



**SMILES Level 2
research algorithms**

P. Baron et al.

The Level 2 research product algorithms for the Superconducting Submillimeter-Wave Limb-Emission Sounder (SMILES)

P. Baron¹, J. Urban², H. Sagawa¹, J. Möller², D. P. Murtagh², J. Mendrok³, E. Dupuy¹, T. O. Sato^{1,4}, S. Ochiai¹, K. Suzuki¹, T. Manabe⁵, T. Nishibori⁶, K. Kikuchi⁶, R. Sato⁶, M. Takayanagi⁶, Y. Murayama¹, M. Shiotani⁷, and Y. Kasai¹

¹National Institute of Information and Communications Technology, 4-2-1 Nukui-kitamachi, Koganei, Tokyo 184-8795, Japan

²Department of Earth and Space Sciences, Chalmers University of Technology, 41296 Göteborg, Sweden

³Department of Computer Science, Electrical and Space Engineering, Luleå University of Technology, 98128 Kiruna, Sweden

⁴Tokyo Institute of Technology, 4259 Nagatsuta-cho, Midori-ku, Yokohama, Kanagawa 226-8503, Japan

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



**SMILES Level 2
research algorithms**

P. Baron et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

I◀

▶I

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



⁵Osaka Prefecture University, 1-1 Gakuen-cho, Nakaku, Sakai, Osaka 599-8531, Japan

⁶Japan Aerospace Exploration Agency (JAXA), 2-1-1 Sengen, Tsukuba, Ibaraki 305-8505, Japan

⁷Research Institute for Sustainable Humanosphere, Kyoto University, Uji, Kyoto 611-0011, Japan

Received: 8 April 2011 – Accepted: 16 May 2011 – Published: 9 June 2011

Correspondence to: P. Baron (baron@nict.go.jp)

Published by Copernicus Publications on behalf of the European Geosciences Union.

Abstract

This paper describes the algorithms of the level-2 research (L2r) processing chain developed for the Superconducting Submillimeter-Wave Limb-Emission Sounder (SMILES). The chain has been developed in parallel to the operational chain for conducting researches on calibration and retrieval algorithms. L2r chain products are available to the scientific community. The objective of version 2 is the retrieval of the vertical distribution of trace gases in the altitude range of 18–90 km. An theoretical error analysis is conducted to estimate the retrieval feasibility of key parameters of the processing: line-of-sight elevation tangent altitudes (or angles), temperature and O₃ profiles. The line-of-sight tangent altitudes are retrieved between 20 and 50 km from the strong ozone (O₃) line at 625.371 GHz, with low correlation with the O₃ volume-mixing ratio and temperature retrieved profiles. Neglecting the non-linearity of the radiometric gain in the calibration procedure is the main systematic error. It is large for the retrieved temperature (between 5–10 K). Therefore, atmospheric pressure can not be derived from the retrieved temperature, and, then, in the altitude range where the line-of-sight tangent altitudes are retrieved, the retrieved trace gases profiles are found to be better represented on pressure levels than on altitude levels. The error analysis for the retrieved HOCl profile demonstrates that best results for inverting weak lines can be obtained by using narrow spectral windows. Future versions of the L2r algorithms will improve the temperature/pressure retrievals and also provide information in the upper tropospheric/lower stratospheric region (e.g., water vapor, ice content, O₃) and on stratospheric and mesospheric line-of-sight winds.

AMTD

4, 3593–3645, 2011

SMILES Level 2 research algorithms

P. Baron et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



1 Introduction

The Superconducting Submillimeter-Wave Limb-Emission Sounder (SMILES) is a highly sensitive radiometer used to study atmospheric chemistry with a focus on the stratosphere (Kikuchi et al., 2010). It was developed by the Japan Aerospace Exploration Agency (JAXA) and the National Institute of Information and Communications Technology (NICT, Japan). Observations have been performed from the Japanese Experiment Module (JEM) onboard the International Space Station (ISS) from October 2009 to April 2010. During that period, SMILES successfully measured the vertical distribution and the diurnal variations of various stratospheric and mesospheric species in the latitude range of 38° S–65° N.

The SMILES ground segment was developed to calibrate the raw spectrometer outputs (i.e., level-0 data) to radiance (i.e., level-1b data), and to retrieve the geophysical products (i.e., level-2 data) (Takahashi et al., 2010). Daily maps are also available (<http://smiles.nict.go.jp/index-e.html>) and level-3 products (daily and monthly averaged data regridded to fixed geographical and vertical coordinates) are under development. In addition, NICT developed tools for research on calibration and retrieval algorithms leading to the development of a level-1b to level-2 chain, hereafter named Level-2 research (L2r) chain whose products are also available to the scientific community¹.

This paper presents the retrieval algorithms used in the L2r chain. SMILES data processing benefits from the heritage of previous submillimeter missions: the Sub-Millimetre Radiometer (SMR) onboard the Odin satellite (2001–) (Murtagh et al., 2002) and the Microwave Limb Sounder (MLS) onboard the Aura satellite (2004–) (Waters et al., 2006). Their retrieval codes are described in Urban et al. (2005); Read et al. (2006); Livesey et al. (2006) (and references therein). The L2r algorithms have been optimized to exploit the low noise level of SMILES and to overcome the absence of a molecular oxygen (O₂) line, generally used to determine the temperature profile and

¹The SMILES data distribution policy is explained at <http://smiles.tksc.jaxa.jp/ra/indexe.shtml>

AMTD

4, 3593–3645, 2011

SMILES Level 2 research algorithms

P. Baron et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



SMILES Level 2 research algorithms

P. Baron et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



the line-of-sight tangent point pressure. The retrieval strategy is different from that of the SMILES operational L2 one: (i) the line-of-sight elevation angles are retrieved from the strong ozone (O_3) line for tangent points between 20 and 50 km altitudes, and (ii) the retrieval procedure has been divided into sequentially dependent processes in order to apply optimised retrieval settings to selected spectral lines in a given altitude range.

In Sect. 2, a brief overview of the instrument and of the level-2 research chain is presented. The strategy for the retrieval procedure is presented in Sect. 3. The forward model used to simulate the measurements is described in Sect. 4. The inversion and the retrieval error characterisation methods are presented in Sect. 5. The performance of the retrieval approach is discussed in Sect. 6. We show results for the key parameters of the retrieval procedure: line-of-sight elevation angles, and temperature and O_3 volume-mixing ratio (VMR) profiles. The error on hypochlorous acid (HOCl) VMR profile is also discussed in order to illustrate the results obtained from a weak signal. Other products are not discussed in this paper. Their validation and error budgets will be described in separate papers. Finally we conclude with a summary and an outlook on the future improvements and new products.

2 Overview of the SMILES measurements and of the L2r chain

SMILES observed spectral lines from the atmospheric limb in three frequency bands, named A (624.3–625.5 GHz), B (625.1–626.3 GHz) and C (649.1–650.3 GHz). Figure 1 shows synthetic spectra for line-of-sight tangent point altitudes of 20, 30 and 40 km and for the three bands (A and B in the upper panel and C in the lower panel). The strongest spectral signature is the O_3 line at 625.371 GHz common to bands A and B. Two strong lines triplets can be seen, one from $H^{37}Cl$ around 625.19 GHz (band A) and the other one from $H^{35}Cl$ around 625.92 GHz (band B). The other lines are significantly less intense. Two bands are measured simultaneously during a continuous vertical scan (Table 1) (Ochiai et al., 2010). Calibration data are recorded at the top of each scan.

SMILES Level 2 research algorithms

P. Baron et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



The atmospheric spectra are recorded every 0.5 s during the first 30.5 s of the scan, with line-of-sight tangent altitudes ranging typically from -10 km to 90 km.

The instrument is a single sideband heterodyne radiometer equipped with a 400×200 mm elliptical antenna. The atmospheric signal is mixed with a local oscillator signal at $\nu_{lo} = 637.32$ GHz in a superconductor-insulator-superconductor (SIS) mixer cooled at 4 K which gives a very low receiver temperature of 300–350 K (Kikuchi and Fujii, 2010). The bands A and B lie in the lower sideband (LSB) of the local oscillator frequency and band C is in the upper sideband (USB). The signal is analysed by two acousto-optical spectrometers (AOS) with similar characteristics: 1728 channels separated by 0.8 MHz with an effective spectral resolution of 1.4 MHz. The AOS channel frequency is calibrated for every scan and corrected from the Doppler shift of ~ 8 MHz caused by the ISS velocity component parallel to the line-of-sight (~ 4 km s $^{-1}$).

The data produced by the version 2 of the L2r chain are the vertical distributions of O₃ and its main isotopes, two isotopomers of hydrochloric acid (H³⁵Cl and H³⁷Cl), chlorine and bromine monoxides (ClO, BrO), nitric acid (HNO₃), hydroperoxyl radical (HO₂), hypochlorous acid (HOCl), hydrogen peroxide (H₂O₂), and methyl cyanide (CH₃CN). The main objective for version 2 algorithms is to retrieve data between 18 to 90 km. Below 18 km, the retrieved data are available but they are strongly affected by the errors on the calibrated radiance and on the modelling of the absorption continuum. They should be used with cautions and the results will not be discussed in the current paper.

The retrieval procedure is composed of sequentially dependent processes, each of them associated with a spectral window and a line-of-sight altitude range. The processes are denoted by the name of the spectral band (A, B or C) and a window index (e.g., w1). The list of the processes is given in Table 2. The same parameter can be retrieved from different processes leading to different products that are defined by the parameter name (e.g., O₃ or temperature) and by the process name (e.g., A-w1). The same forward and retrieval models are used for each process but the setting (e.g., position and size of the window) is optimized according to the characteristics of the

spectral lines of interest and of the altitude range. L2r products are distributed in daily files using the HDF-EOS format (<http://www.hdfgroup.org/hdfEOS.html>).

The L2r chain runs on a cluster of LINUX (Ubuntu distribution) PCs composed of 90 computing units. During the processing phase, the L2r chain exploits most of the resources in term of CPUs and RAM. One day of observations (~1600 scans) is processed in about 5–6 h. The L2r chain has been implemented with open source and free software: MySQL database server (<http://dev.mysql.com/>), Torque/Maui jobs scheduler (<http://www.clusterresources.com>), the GNU-fortran (<http://gcc.gnu.org/>) and python languages (<http://www.python.org/>), and the Scipy and Matplotlib libraries (<http://www.scipy.org/>).

3 Retrieval strategy

At the SMILES observation frequencies, the atmosphere is opaque at altitudes below typically 10 to 12 km, depending on the upper tropospheric (UT) water vapor content. The right panel of Fig. 3 shows the variation with the line-of-sight tangent altitude of the measured brightness temperature at 624.547 GHz (red line). For altitudes where the atmosphere is opaque, the brightness temperature reaches a saturated level at about 220 K: the measurement is not sensitive to the atmospheric conditions below about 12 km. Scattering by ice particles can also occur in the UT yielding a clear depletion of the saturated brightness temperature (Fig. 3, right panel). Although ice water content in the UT can be retrieved from these UT observations (Ekström et al., 2007; Wu et al., 2008; Mendrok et al., 2008), the observations contaminated by ice particles scattering are excluded in the current processing.

The line-of-sight tangent altitudes (or angles) are key parameters that should have been obtained by the star tracker attached to the instrument. However the star tracker data have been found to be noisy in the level-1b data (version 5). Therefore the altitudes data based on the ISS Guidance, Navigation, and Control system are used instead. For each scan, the line-of-sight angles must be corrected for a global offset

SMILES Level 2 research algorithms

P. Baron et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



**SMILES Level 2
research algorithms**

P. Baron et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

I◀

▶I

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



that can be as large as 0.2° (8 km on the tangent point altitude). The correction is performed before the retrieval procedure by matching the measured brightness temperatures with the ones computed with the forward model (Sect. 4). The precision is better than 0.001° . The atmospheric inputs for the calculation are the temperature, pressure, H_2O and O_3 profiles from the version 5.2 of the analysis of the Goddard Earth Observing System Data Assimilation System model (GEOS-5.2) (Reinecker, 2008), and other species are from various climatologies. GEOS-5 data are given every 6 h on $2/3 \times 1/2$ degree longitude-latitude horizontal grid. We have chosen to use the closest GEOS-5 profile to the middle of the scan of interest. Figure 3 shows the forward model calculation before (dashed line) and after (black solid line) line-of-sight angles correction.

Below typically 18 km, pressure broadening leads to overlapping wings of spectral lines. Contributions from the atmospheric parameters are thus mixed and only a limited number of parameters can be retrieved. In this study, the distributions of O_3 , H_2O , HCl and ClO are retrieved from the full spectral band (bandwidth of 1.2 GHz). Temperature and pressure profiles are fixed parameters from GEOS-5, a precision of 1 K is expected on the temperature.

Above 18 km, spectral lines of different atmospheric molecules are separated from each other and from the continuum radiation background. Between 20–50 km, temperature can be retrieved from the central channels of the strong O_3 line (Baron et al., 2001). Furthermore, the O_3 VMR profile and line-of-sight angles have distinct signatures in the measurement: the spectral line amplitude changes with VMR while the spectral line width changes with the line-of-sight angle. This study shows that the low measurement noise allows to distinguish and consequently to retrieve both parameters.

The full retrieval procedure is composed of the following processes:

1. The line-of-sight elevation angles are retrieved between 20 and 50 km from the intense O_3 line at 625.371 GHz (A-w0 and B-w0 in Table 2). The spectral window between 625.042 and 625.612 GHz is used both for bands A and B. The line-of-sight elevation angles outside the retrieval vertical range are computed by linearly extrapolated the retrieved angles vertical trend.

SMILES Level 2 research algorithms

P. Baron et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



2. Temperature and O_3 are retrieved above 18 km from the same spectral range used in step 1 (A-w1 and B-w1). Temperature is retrieved up to ~60 km and O_3 up to 90 km. The isotope $OO^{18}O$ is also retrieved simultaneously from two small lines at 625.901 and 625.563 GHz.

3. The strong lines of HCl are inverted between 18–90 km in the spectral ranges 624.445–625.040 GHz for $H^{37}Cl$ (A-w2) and 625.714–626.264 GHz (B-w2) for $H^{35}Cl$.

4. Then, a set of narrow windows (Table 2) are inverted to fit the weak lines in the middle stratosphere and mesosphere. In the current version of the processing, it has been chosen to not use the retrieved temperature and line-of-sight angle to invert the spectral windows of band C.

5. The full spectral bands between 12 and 30 km are processed separately to retrieve the VMR of O_3 , H_2O , HCl and ClO in the UT/lower stratosphere (LS).

4 Forward model

The measured signal is simulated from the computation of the specific intensity I^{atm} ($W m^{-2} sr^{-1} Hz^{-1}$) of the outgoing atmospheric radiation and by taking into account the SMILES instrument characteristics, i.e., the antenna field of view, the AOS channel shape and the mixing of the upper and lower sidebands. Details on the forward model computation are presented in Urban et al. (2004) and Baron et al. (2008). In this section, we focus on the parameters relevant to the SMILES analysis. The signal is expressed with a brightness temperature unit using the Rayleigh-Jeans linear transformation. For bands A and B that are both measured in the lower sideband, the brightness temperature $T^{a,b}$ measured in the i th channel is:

$$T^{a,b}(\theta_j, \nu_i) = \frac{c^2}{2 k_b \nu_i^2} \int_{\Delta\theta, \Delta\nu} G_e^{\text{ANT}}(\theta, \theta_j, \omega) g^{\text{AOS}}(\nu^{\text{lsb}}, \nu_i) \frac{(1 - R^{\text{lsb}}(\nu^{\text{lsb}})) I^{\text{atm}}(\nu^{\text{lsb}}, \theta) + R^{\text{usb}}(\nu^{\text{usb}}) I^{\text{atm}}(\nu^{\text{usb}}, \theta)}{1 - R^{\text{lsb}}(\nu^{\text{lsb}}) + R^{\text{usb}}(\nu^{\text{usb}})} d\theta d\nu^{\text{lsb}}, \quad (1)$$

where θ_j is the mean elevation angle of the antenna during the spectrum integration, θ is the optical path elevation angle for the specific intensity calculation, G_e^{ANT} is the effective vertical antenna pattern, g^{AOS} is the AOS channel response function (see Appendix A), ν_i is the frequency of the i -th channel, ν^{lsb} and $\nu^{\text{usb}} = 2\nu_{10} - \nu^{\text{lsb}}$ are the lower and upper bands frequencies, R^{usb} and R^{lsb} are the upper and lower sidebands rejection values (see Appendix B). The term before the integral operator is the Rayleigh-Jeans factor and the Boltzmann constant $k_b = 1.380662 \times 10^{-23} \text{ J K}^{-1}$. The formula for band C radiance is obtained by interchanging the superscript labels usb and lsb.

The contribution of the image band has been removed in the current processing: $R^{\text{usb}} = R^{\text{lsb}} = 0$. It will be shown in Sect. 5.2 that the impact of such simplification is small compared to current calibration errors. The atmosphere is horizontally stratified and only the integration in the vertical direction is performed. The vertical effective antenna pattern $G_e^{\text{ANT}}(\theta, \theta_j, \omega)$ includes the rotation ω of the 2-D antenna pattern with respect to the line of sight, the integration over the azimuth angle of the 2D antenna pattern and the vertical scanning motion (Shiotani et al., 2002, 40–52 pp.). The vertical integration range $\Delta\theta$ is -4.2 to 4.2° ; The contribution from outside this range is removed in the calibration procedure.

The specific intensity is computed by solving the radiative transfer equation along the optical path:

$$I^{\text{atm}}(\nu, \theta) = \int_{\text{PATH}} B(T_s, \nu) \alpha(s, \nu) \exp \int_{s'=s}^{\text{sensor}} -\alpha(s', \nu) ds' ds + I_0(\nu, \theta),$$

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



SMILES Level 2 research algorithms

P. Baron et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



where s and s' indicate the positions on the integration path, α is the absorption coefficient, $B(T, \nu)$ is the Planck function at temperature T and I_0 is the background radiation (Earth surface, or cold space at the physical temperature of 2.7 K giving a brightness temperature of 4×10^{-4} K). The atmosphere is assumed to be in the hydrostatic equilibrium. Scattering and absorption from solid and liquid particles are not important for submillimeter wavelengths except in the presence of relatively thick clouds in the upper troposphere. The bending of the optical path by atmospheric refraction is taken into account by using a non dispersive expression of the refractive index n_0 (Rüeger, 2002):

$$n_0 = 1 + 10^{-8} \left(77.6890 \frac{P_d}{T} + \frac{P_w}{T} \left(71.2952 + \frac{375463}{T} \right) \right),$$

where P_d and P_w are the dry air and water vapor partial pressures (Pa). The dry air refractive contribution assumes a CO_2 content of 375 ppm.

The absorption coefficient includes the molecular spectroscopic lines and the absorption continua from dry air and water vapor. The continua parametrisation (Pardo et al., 2001) has been derived from atmospheric measurements at submillimeter wavelengths. It should be noted that at SMILES frequencies, the measured dry air continuum is 20–30 % below theoretical estimations (Boissoles et al., 2003). Such error has a significant impact on the retrieved UT/LS data and should be checked in future versions.

The spectroscopic line shape is a Van-Vleck and Weisskopf profile in the lower atmosphere where the line Doppler broadening is 40 times smaller than the collisional (pressure) broadening. At higher altitudes, a Voigt profile is used (Schreier and Kohlert, 2008). The collisional line broadening parameter includes the self-broadening parameter when available. The line frequency ν_q is shifted by the atmospheric pressure:

$$\nu_q = \left(\nu_q^0 + \delta_\nu^q P \left(\frac{T_0}{T} \right)^{n_1} \right),$$

where ν_q^0 is the line frequency and δ_ν^q is the pressure induced frequency shift parameter at temperature T_0 and n_f is its temperature dependence.

A catalogue of spectroscopic line parameters between 0 and 1 THz has been created using parameters from the JPL catalogue (Pickett et al., 1998), completed with the line pressure-broadening and frequency pressure-shift parameters from the HITRAN database (Rothman et al., 2009). The parameters have been updated with the latest laboratory measurements. Less than 1200 lines per band are considered in line-by-line calculations. The line selection algorithm selects all the lines inside the bands that have an intensity larger than 0.1 K between 15–90 km altitudes. The most significant out-of-band lines of O_3 and H_2O are selected. For both molecules, selected out-of-band lines contribute to 99 % of the out-of-band lines absorption calculated with no selection at 5 regularly-spaced frequencies in the band. The same method is used for out-of-band lines of other molecules but the selection is performed for all species together and with a line selection threshold of 90 %. Lines with frequency lower than 100 GHz (mainly O_2 lines) are arbitrarily removed.

The absorption coefficient and the radiative transfer are computed on a non equidistant frequency grid composed of less than 1500 points that is defined to avoid errors larger than 0.5 K. Errors are estimated with the comparison of AOS radiances with those obtained with a fine frequency grid of 0.25 MHz resolution.

5 Methodology for the inversion and for the errors characterisation

5.1 Inversion method

Within each retrieval process, a least-squares method with regularisation is used to seek for the value of the forward model's unknown parameters x that minimizes the cost function χ^2 . The latter is given by

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



$$\chi^2 = \frac{(\mathbf{y} - \mathbf{F}(\mathbf{x}, \mathbf{b}))^T \mathbf{S}_y^{-1} (\mathbf{y} - \mathbf{F}(\mathbf{x}, \mathbf{b})) + (\mathbf{x}_a - \mathbf{x})^T \mathbf{S}_a^{-1} (\mathbf{x}_a - \mathbf{x})}{n_y + n_x}, \quad (2)$$

where $\mathbf{y}$ is the measurement vector of n_y elements, $\mathbf{S}_y$ is the measurement covariance matrix, $\mathbf{F}(\mathbf{x}, \mathbf{b})$ is the forward model (Eq. 1) depending on $\mathbf{x}$ and on the known model parameters $\mathbf{b}$, n_x is the size of the vector $\mathbf{x}$, $\mathbf{x}_a$ is the a priori value of $\mathbf{x}$ and $\mathbf{S}_a$ the a priori covariance matrix. The a priori term corresponds to n_x additional virtual measurements used to regularize the inversion process (Rodgers, 2000). The off-diagonal elements of $\mathbf{S}_y$ are assumed to be null and the diagonal elements are set to the square of the thermal noise level. For SMILES, the latter is determined using the following form of the radiometric noise equation:

$$\epsilon_n = \frac{T_{\text{rec}}(v_i) + T(v_i, \theta)}{\sqrt{\beta d \tau}}, \quad (3)$$

with the receiver temperature, T_{rec} , between 300–350 K, the antenna temperature, T , between 0–250 K, the noise-equivalent spectral resolution $\beta = 2.5$ MHz, and the integration time of a single spectrum $d\tau = 0.5$ s. The actual measurement noise is thus ~ 0.3 K but a fixed value of 0.5 K is used in this analysis.

The a priori covariance matrix is built using an a priori error ϵ_a that does not correspond to the natural variability of $\mathbf{x}$, but to the measurement sensitivity. For instance, a large value of ϵ_a (between 100–200 % of a typical profile) is used for species such as BrO or H₂O₂ that are retrieved from weak noisy lines. The retrieved profiles are then noisy and must be averaged to increase the precision. An altitude correlation in the a priori covariance matrix is used for each product according to the vertical resolution estimated from preliminary sensitivity studies (see Sect. 5.2). The correlation values are between 2 and 6 km. The a priori value of O₃, H₂O and temperature/pressure are from the GEOS-5 analysis (see Sect. 3). As the version of GEOS-5 model used in this analysis is valid below about 70 km, the temperature and pressure profiles are extrapolated to 110 km using the MSIS temperature climatology (Hedin, 1991) with a

SMILES Level 2 research algorithms

P. Baron et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



method similar to that used for the Odin/SMR level-2 processing. Other GEOS-5 profiles are extrapolated with a constant value. Other species are described by a unique profile obtained from different climatologies, a low confidence level is given to these data. Table 3 summarized the a priori data used in the processing.

5 To solve Eq. (2), the vector $\mathbf{x}$ is scaled with respect to $\mathbf{x}_a$ and to the a priori error ϵ_a :

$$\boldsymbol{\eta} = (\mathbf{x} - \mathbf{x}_a) / \epsilon_a \quad (4)$$

The solution is found with a Gauss-Newton iterative procedure modified by Levenberg (Rodgers, 2000, Chap. 5.7, Eq. 5.35).

$$\boldsymbol{\eta}_{i+1} = \boldsymbol{\eta}_i + \left(\mathbf{K}_i^T \mathbf{S}_y^{-1} \mathbf{K}_i + \mathbf{S}_{\boldsymbol{\eta}}^{-1} + \gamma \mathbf{I} \right)^{-1} \left(\mathbf{K}_i^T \mathbf{S}_y^{-1} (\mathbf{y} - \mathbf{F}_i) - \mathbf{S}_{\boldsymbol{\eta}}^{-1} \boldsymbol{\eta}_i \right), \quad (5)$$

10 where the subscripts i and $i + 1$ indicate the iteration stage, $\mathbf{F}_i$ is the forward model output for $\mathbf{x} = \mathbf{x}_i$, $\mathbf{K}_i = \left(\frac{\partial \mathbf{F}}{\partial \boldsymbol{\eta}} \right)_i$ is the weighting function matrix, $\mathbf{S}_{\boldsymbol{\eta}}$ is the covariance matrix of the scaled vector $\boldsymbol{\eta}$, γ is the Levenberg-Marquardt parameter and $\mathbf{I}$ is a diagonal scaling matrix. The diagonal elements of $\mathbf{I}$ are set to 1, except for the components of $\mathbf{x}$ that have a small impact on the χ^2 and for which the value is zero. The a priori state of $\boldsymbol{\eta}$ is null and it is not written in Eq. (5). The covariance matrix $\mathbf{S}_{\boldsymbol{\eta}}$ is derived from the a priori covariance matrix as:

$$\mathbf{S}_{\boldsymbol{\eta}} = \mathbf{D} (1/\epsilon_a) \mathbf{S}_a \mathbf{D} (1/\epsilon_a)^T, \quad (6)$$

with $\mathbf{D}(1/\epsilon_a)$ the diagonal matrix with diagonal elements equal to the vector $1/\epsilon_a$. The weighting function matrix $\mathbf{K}_i$ is related to the Jacobian matrix of the unscaled parameters as below:

$$K_i[m, n] = \left(\frac{\partial F[m]}{\partial x[n]} \right)_i \epsilon_a[m], \quad (7)$$

where m and n are the measurement and parameters indexes, respectively.

SMILES Level 2 research algorithms

P. Baron et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



If temperature is retrieved, the pressure profile can be derived from the hydrostatic equilibrium using a known pressure and temperature at a reference altitude. We use a reference altitude of 18 km and data from the GEOS-5 analysis. The pressure profile is computed above the reference altitude on a fine resolution vertical grid of 100 m. The temperature profile is linearly interpolated on this fine grid and the discrete hydrostatic equation becomes:

$$\frac{P[i+1] - P[i]}{P[i]} = -g(\Phi) \left(1 - \frac{\bar{z}[i]}{r(\Phi)}\right) \frac{M_a}{R} \frac{z[i+1] - z[i]}{\bar{T}[i]}, \quad (8)$$

where i and $i+1$ are the indices of two consecutive vertical levels, $P[i]$ (hPa) is the pressure at the altitude z_i (m), Φ (rad) is the latitude angle, $r(\Phi) = 6378130 \left(1 - \frac{\sin(\Phi)^2}{298.25}\right)$ is the effective Earth radius (m), $g(\Phi) = 9.80616(1 - 0.0026373\cos(2\Phi) + 5.9 \times 10^{-6}\cos(2\Phi)^2)$ is the gravity at the surface (m s^{-2}), $R = 8.3145 \text{ J K}^{-1} \text{ mol}^{-1}$ is the gas constant, $M_a = 0.028964 \text{ kg mol}^{-1}$ is the molar mass of air, and $\bar{z}[i]$ and $\bar{T}[i]$ are the mean altitude and the mean temperature (K) between the levels i and $i+1$. The pressure profile is a retrieved parameter although it is not a direct product of the inversion computation (Eq. 5). Note that it could have been retrieved along with other parameters by adding the hydrostatic equilibrium equation as an additional constraint of the inversion (Carlotti and Rodolfi, 1999).

The implementation of the inversion procedure is presented in the flowchart in Fig. 2. After the parameters initialisation, the forward model is run to calculate the simulated measurements and their weighting functions and to estimate χ^2 (step 1). In step 2, the scaled vector η is calculated and the Marquardt loop counter is set to 0. The inversion is performed in step 3 according to Eq. (5), the retrieved vector is unscaled and the pressure profile is reconstructed (if needed) from the retrieved temperature. The forward model is computed for x_{i+1} and the new χ^2 is estimated. If χ^2 increases, the process enters into the Marquardt branch: the Marquardt loop counter is incremented, γ is multiplied by 3 and the sequence of operations from step 3 is repeated. If χ^2 decreases and the final loop criteria are not fulfilled, the main loop counter is

incremented, γ is divided by 3 and the procedure is repeated from step 1. These operations are performed until the change in χ^2 is less than 0.05 or the number of iterations is more than 12 in the main loop or more than 5 in the Marquardt loop. The procedure has converged if the χ^2 has decreased. A good convergence is reached for a final χ^2 between 0.6–2 and a small value of γ below 0.5. Otherwise, a warning flag is raised. Note that the lower value of the χ^2 is less than 1 because of the overestimation of the error in the measurement covariance matrix $\mathbf{S}_y$.

5.2 Errors characterisation

The smoothing and measurement covariance matrices as defined in Marks and Rodgers (1993) are naturally computed for the retrieved scaled parameters:

$$\mathbf{S}_n = (\mathbf{I} - \mathbf{A}) \mathbf{S}_\eta (\mathbf{I} - \mathbf{A})^T \text{ and } \mathbf{S}_m = \mathbf{G} \mathbf{S}_y \mathbf{G}^T \quad (9)$$

where $\mathbf{G} = (\mathbf{K}^T \mathbf{S}_y^{-1} \mathbf{K} + \mathbf{S}_\eta^{-1})^{-1} \mathbf{K}^T \mathbf{S}_y^{-1}$ and $\mathbf{A} = \mathbf{G} \mathbf{K}$ is the averaging kernel matrix. The smoothing error can be interpreted as the error caused by the limited vertical resolution of $\hat{\eta}$ and as the error due to the contaminations from the simultaneously retrieved parameters (Baron et al., 2002). The vertical resolution is estimated from the width of the averaging kernels. Nevertheless interpreting the smoothing error as a vertical resolution definition makes sense only where the contribution from the a priori is small, otherwise the smoothing error should be interpreted as a bias toward the a priori profiles. In order to evaluate the a priori contribution, we use the measurement response: $W = \sum_j (|\mathbf{A}[i, j]|)$. In this study we consider only that the vertical range of a good retrieval is for altitudes where $|W - 1| < 0.2$.

The measurement response, the vertical resolution and the smoothing and measurement errors on the unscaled retrieved parameters $\hat{\mathbf{x}}$ are provided along with the L2r data. The errors are derived from the square root of the diagonal elements of $\mathbf{S}_n$ and $\mathbf{S}_m$. They will be known hereafter as linear mapping errors. However the linear mapping provides a poor representation of the actual errors. In our definition, the

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



SMILES Level 2 research algorithms

P. Baron et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



covariance matrix $\mathbf{S}_a$ is not representative of the real uncertainties on the a priori profiles (see Sect. 5.1) and the retrieval sub-grid size atmospheric variability is not taken into account in the smoothing error. Furthermore, the measurement covariance matrix $\mathbf{S}_y$ takes into account the measurement noise only, and errors on the forward model parameters are not included. Parameters retrieved from one process can be used in the following ones, causing the errors to propagate throughout the processes. Also, processes can share common measurements components, causing errors correlation. For example, the line-of-sight elevation angles and the O_3 profile are retrieved from two different processes which use the same spectral line. Below, we describe the method we used to take into account the inter-process errors propagation and correlation as well as the retrieval sub-grid size atmospheric variability.

The inversion method, implemented for each process, is expressed as the inverse function I :

$$\hat{\mathbf{x}} = I \left(\mathbf{y} \left(\mathbf{x}, \hat{\mathbf{p}}, \mathbf{b} \right) - F \left(\mathbf{x}_i, \hat{\mathbf{p}}, \mathbf{b} \right), \mathbf{x}_a \right), \quad (10)$$

where $\hat{\mathbf{x}}$ is the estimate of the parameter $\mathbf{x}$ and $\mathbf{x}_a$ is its a priori value, $\mathbf{y}$ is the measurement and F is the forward model, $\hat{\mathbf{p}}$ is the vector of parameters retrieved in a previous process and $\mathbf{b}$ is the vector of known forward model parameters. The vector $\mathbf{x}_i$ is initialised with $\mathbf{x}_a$ and after convergence should be equal to $\hat{\mathbf{x}}$. In the following $\mathbf{y}$ will not be the real measurement but a simulation depending on $\mathbf{x}$, $\mathbf{b}$ and $\hat{\mathbf{p}}$. Note that $\mathbf{x}_a$ and $\hat{\mathbf{x}}$ are defined on a retrieval grid with steps of 2–6 km and $\mathbf{x}$ is defined on a fine vertical grid with steps of 250 m.

The retrieved error $\hat{\mathbf{e}}_{\hat{\mathbf{x}}}$ on $\hat{\mathbf{x}}$ is derived by linearising the inverse function with respect to the “uncorrect” parameters (Rodgers, 2000). It gives for Eq. (10):

$$\hat{\mathbf{e}}_{\hat{\mathbf{x}}} = \left(\frac{\partial I}{\partial \mathbf{y}} + \frac{\partial I}{\partial F} \frac{\partial F}{\partial \hat{\mathbf{p}}} \frac{\partial \hat{\mathbf{p}}}{\partial \mathbf{y}} \right) \mathbf{e}_{\mathbf{y}} + \left(\frac{\partial I}{\partial F} \frac{\partial F}{\partial \mathbf{b}} + \frac{\partial I}{\partial F} \frac{\partial F}{\partial \hat{\mathbf{p}}} \frac{\partial \hat{\mathbf{p}}}{\partial \mathbf{b}} \right) \mathbf{e}_{\mathbf{b}} + \left(\frac{\partial I}{\partial \mathbf{y}} \frac{\partial \mathbf{y}}{\partial \mathbf{x}} + \frac{\partial I}{\partial \mathbf{y}} \frac{\partial \mathbf{y}}{\partial \hat{\mathbf{p}}} \frac{\partial \hat{\mathbf{p}}}{\partial \mathbf{x}} \right) \mathbf{e}_{\mathbf{x}} + \frac{\partial I}{\partial F} \frac{\partial F}{\partial \mathbf{p}} \hat{\mathbf{e}}_{\mathbf{p}}, \quad (11)$$

where $\mathbf{e}_{\mathbf{y}}$ is the error on the measurement, $\mathbf{e}_{\mathbf{b}}$ is the error on $\mathbf{b}$, $\mathbf{e}_{\mathbf{x}}$ is the error on the first guess of $\mathbf{x}$, $\hat{\mathbf{e}}_{\mathbf{p}}$ is the error on $\hat{\mathbf{p}}$ from errors that do not explicitly appear in the error budget. The latter can include, for example, the errors on the measurement

that are not included in the current process. The terms depending on $\frac{\partial F}{\partial \rho}$ represent the inter-process error propagation and correlation.

The different terms can be estimated by perturbing the parameters of either the simulated measurement ($\mathbf{y}$) or the forward model (F). In this study, we have chosen to perturb the measurement parameters. We used two methods, one based on finite difference calculation and the second based on statistical evaluation (e.g., standard deviation) of a set of retrieved profiles (100 simulations are performed for each parameter vector of interest). The choice of the method depends on the size of parameter vector to be perturbed. For a vector $\boldsymbol{\beta}$ with uncorrelated components, the variance of the retrieved state vector is:

$$\begin{cases} \hat{\sigma}_{\beta} = \sum_i [I(\mathbf{y}(\boldsymbol{\beta}[i] + \bar{\epsilon}_{\beta}[i], \hat{\mathbf{p}}(\boldsymbol{\beta}[i] + \bar{\epsilon}_{\beta}[i])) - I(\mathbf{y}, \hat{\mathbf{p}})]^2 & \text{for a finite difference analysis} \\ \hat{\sigma}_{\beta} = \text{STD} \{I(\mathbf{y}(\boldsymbol{\beta} + \boldsymbol{\epsilon}_{\beta}, \hat{\mathbf{p}}(\boldsymbol{\beta} + \boldsymbol{\epsilon}_{\beta})))\}^2 & \text{for a statistical analysis} \end{cases} \quad (12)$$

Here $\mathbf{y}$ is the perturbed simulated measurement, $\hat{\sigma}_{\beta}$ is the retrieval error variance due to the vector $\boldsymbol{\beta}$, $\bar{\epsilon}_{\beta}[i]$ is the error on the i -th element of $\boldsymbol{\beta}$, $\boldsymbol{\epsilon}_{\beta}$ is a random vector of standard deviations $\bar{\epsilon}_{\beta}$ and STD denotes the standard deviation of a set of retrieval outputs. To take into account correlations between the $\boldsymbol{\beta}$ components, independent perturbations are applied to the eigenvectors of the $\boldsymbol{\beta}$ covariance matrix. For example, the finite difference case becomes:

$$\hat{\sigma}_{\beta} = \sum_i \left(I(\mathbf{y}(\boldsymbol{\beta} + \mathbf{U} \bar{\epsilon}_{\Lambda}^i), \hat{\mathbf{p}}(\boldsymbol{\beta} + \mathbf{U} \bar{\epsilon}_{\Lambda}^i)) - I(\mathbf{y}) \right)^2, \quad (13)$$

where $\mathbf{U}$ and $\boldsymbol{\Lambda}$ are the eigenvectors and eigenvalues matrices of the $\boldsymbol{\beta}$ covariance matrix $\mathbf{S}_{\beta}$ ($\mathbf{S}_b = \mathbf{U}\boldsymbol{\Lambda}\mathbf{U}^T$), and $\bar{\epsilon}_{\Lambda}^i$ is a vector describing the error on the i -th eigenvector in the eigenvector space:

$$\epsilon_{\Lambda}^i[j] = \begin{cases} \sqrt{\Lambda[j, j]} & \text{if } j = i \\ 0 & \text{if } j \neq i. \end{cases}$$

The SMILES calibrated radiance (version 5) has a large error (between -1 and 10 K) likely due to the non-correction of the radiometric gain non-linearity (Ochiai et al., 2011).

SMILES Level 2 research algorithms

P. Baron et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



To study this effect, the simulated measurement y is computed from a modified form of the forward model (Eq. 5):

$$y = C_{\text{cal},0} + C_{\text{cal},1} \times F(x, p, b) + N_{\text{cal}}(F(x, p, b)) \tag{14}$$

where N_{cal} is a non-linear transformation to include the effect of the radiometric gain compression, and the coefficients $C_{\text{cal},0} = 1$ K and $C_{\text{cal},1} = 1.01$ are the antenna spill-over and the radiometric gain error. The details about the calibration procedure and the gain compression errors are given in Appendix C. The value of $C_{\text{cal},0}$, $C_{\text{cal},1}$ are upper limits deduced from the data, and the non-linear transformation is based on the latest calibration model provided by the instrument team.

Other errors are summarised in Table 4. They can be classified as random or systematic errors with respect to a single profile measurement. Systematic errors arise from the calibration parameters, the AOS channel width, neglecting the image band contribution, the dry air continuum and the spectroscopic parameters. Only the pressure-broadening parameters of the strongest lines in bands A and B are included in this study.

The random errors are the measurement thermal noise and the errors on the line-of-sight angles and on the atmospheric profiles. Uncorrelated errors of 0.005–0.01° (errors of 200–350 m on the tangent point altitude) are assumed on the line-of-sight angles (Shiotani et al., 2002, 60p.). We have chosen to use an error of 0.007°. In reality, the value might be lower and more investigations have to be conducted to assess the actual line-of-sight angle errors.

6 Performance of the retrieval procedure

The objectives of this section are multiple. We first demonstrate and evaluate the capability of retrieving the line-of-sight elevation angles along with the O_3 and temperature profiles from the strong O_3 line at 625.371 GHz. We show that temperature is retrieved

SMILES Level 2 research algorithms

P. Baron et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



with low precision and accuracy and recommend to use pressure as vertical coordinates for data retrieved in the altitude range where the line-of-sight tangent altitudes are retrieved. We also show the interest of reducing the width of the spectral windows containing weak lines in order to decrease the contamination from neighbouring lines.

5 This issue is discussed through the error analysis for the HOCl retrieved profile.

The assumed uncertainties on the measurements and on the forward model parameters are given in Table 2. Retrieval errors have been assessed for all the parameters listed in this table but only the results with an impact larger than 1 % are shown. The O₃, HCl and HOCl profiles used for the error characterisation are shown in Fig. 4.

10 6.1 Retrieval of the line-of-sight elevation angles

Line-of-sight angles are retrieved from the processes A-w0 and B-w0 (Table 2). The spectral window is the same for both bands. It is centred at 625.371 GHz on the strong O₃ line, and extends over at least 200 MHz on both sides of the line center. Figure 4 shows the O₃ line measured at a tangent height of 20 km. Given a pressure line width of 2.198 MHz/hPa, information can theoretically be retrieved from the line shape down to ~100 hPa, i.e., down to an altitude of ~16 km. The spectral window setting also reduces the contamination from the neighbouring HCl lines. The profiles of O₃, temperature, HCl isotopomers, H₂O, HOCl, O₃v2, O₃v1,3 and OO¹⁸O are simultaneously retrieved on a sparse vertical grid of 3 km step below 30 km and 5 km above. They are considered as interfering parameters. A frequency offset for the full scan is also retrieved to account for the AOS channel frequency calibration and the O₃ line frequency errors. In addition, a linear baseline (offset and slope) is retrieved for each spectrum to remove radiance offsets due to reflections in the instrument optics and to the antenna spill-over. The inversion iterative cycle usually converges in 5–7 iterations.

25 The averaging kernels and the measurement response (Fig. 6, left panel) show that the line-of-sight angles are retrieved between 18 and 60 km. The high value of the measurement response and the well-peaked averaging kernels at 18 km show that the lowest limit of the retrieval altitude range could theoretically have been pushed

SMILES Level 2 research algorithms

P. Baron et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



SMILES Level 2 research algorithms

P. Baron et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



further down. The lowest altitude of the retrieval grid has been chosen at 18 km in order to avoid errors from the continuum absorption modelling and contamination from ice particles scattering. The random errors (precision) of the angles retrieved from a single scan are between $0.004\text{--}0.005^\circ$ (~ 200 m on the tangent point altitude) below 50 km (Fig. 7, left panel). Pressure is the dominant source of random errors. Errors from the measurement noise and other atmospheric parameters are lower than 0.002° . Above 50 km, the random error due to the thermal noise becomes predominant and the total error is about 0.007° .

The right panel of Fig. 7 shows the systematic errors (accuracy) on the retrieved line-of-sight angles. Neglecting the non-linearity of the calibration gain induced a systematic error of $0.004\text{--}0.007^\circ$ (error of 160–280 m). Between 30 and 50 km, the error due to the O_3 line pressure-broadening parameter (0.003 to 0.004°) is the second source of systematic error. Above 50 km, the systematic error increases strongly up to 0.008° , mainly due to the error on the AOS channel width. Below 20 km, errors is estimated to 0.008° due to non-linearity calibration gain and to the absorption continuum from dry air.

According to this results, the line-of-sight elevation angles is retrieved from the strong O_3 line between 20–50 km.

6.2 O_3 and temperature retrievals

Temperature and O_3 are simultaneously retrieved from the processes A-w1 and B-w1. The spectral characteristics of the widows are the same as for the w0 window used for the line-of-sight angles retrieval (Fig. 4, left panel). Spectra with line-of-sight tangent heights between 16–100 km are selected. The retrieval vertical grid for atmospheric parameters has a spacing of 2 km between 18–30 km, 3 km between 30–60 km, 4 km between 60–80 km and 6 km above. The retrieval grid corresponds to the vertical resolution estimated from a preliminary error analysis. A mean offset on the line-of-sight angles is also retrieved. However we found that in general this offset is small (less than

0.001°), indicating that the line-of-sight angles are correctly updated from process w0. Other retrieval settings such as other contaminating species and a priori and covariance matrices are the same as for process w0. The averaging kernels analysis shows that the O₃ profile can be retrieved from 18 to 90 km with a vertical resolution close to the retrieval grid sampling (Fig. 8).

The random errors (precision) on the retrieved O₃ profile are shown in the left panels of Fig. 9. The upper and the lower panels show the absolute and relative errors, respectively. Between 28–50 km, the random error is 5–7 % (0.4–0.7 ppmv). The main error source is from the pressure profile. The errors on the line-of-sight angles are efficiently corrected and are responsible of less than 2 % error on the O₃ profile. Below 28 km, the error on the line-of-sight angles becomes the main source of random error (50 % at 20 km). However, it is smaller than the value obtained if the angles were not retrieved (Fig. 10). Between 50–75 km, where it cannot be retrieved, the line-of-sight angles is the main error source (20 %). Above 75 km, the O₃ line intensity decreases strongly and the measurement noise becomes the main source of random error on the retrieved O₃ profile.

The systematic errors (accuracy) on the retrieved O₃ profile are presented on the right panels of Fig. 9. Between 20 km and 50 km, a systematic error of 5–15 % is found that is mainly induced by the non-linearity of the calibration gain. Below 30 km, the error from the dry air continuum is significant (5 % at 25 km), and becomes the main systematic error on the retrieved O₃ profile below 21 km. The error due to the O₃ line pressure-broadening parameter is significant above 30 km (4–5 %). Above 50 km, the systematic error is 7–9 %, due to the errors on the AOS channel width, on the O₃ line pressure-broadening parameter and on the non-linearity of the calibration gain.

Temperature is retrieved between 18–55 km with a vertical resolution of 6–14 km (Fig. 11). A random error of 2–10 K (Fig. 12) is induced by errors on the O₃ and pressure profiles. The error is significantly larger than the smoothing error shown in the central panel of Fig. 11 (less than 2 K). The difference is due to oscillations on the temperature profiles retrieved from the simulated measurements. It is thus an error

SMILES Level 2 research algorithms

P. Baron et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



inherent to the inversion regularisation. A different regularisation should be implemented to improve the results.

As for O_3 , the non-linearity on the calibration gain (Fig. 12, left panel) is the main systematic error. It is responsible of a large error of 8–10 K. At 20 km, the dry air continuum induces a significant systematic error of 2 K.

The results for temperature are not satisfactory and must be improved. Consequently, atmospheric pressure is not derived from the retrieved temperature in version 2 of the processing. It becomes the main source of random errors on the retrieved O_3 profile and on the line-of-sight angles.

6.3 Use of pressure as vertical coordinates

If the line-of-sight elevation angle is retrieved, the height of the tangent point is adjusted to the pressure level corresponding to the O_3 line width. Since the pressure at the line-of-sight tangent point is correct, the error on the pressure profile should be considered as an error on the altitude and not on the pressure itself. As the molecular abundance is retrieved at the tangent point, it is then better to represent the retrieved molecular abundance on pressure levels instead of altitude levels. Retrieved data are distributed along with the altitude and the pressure of the vertical levels. Figure 13 is a comparison of the O_3 retrieval error induced by pressure estimated on pressure levels, and the error estimated on altitude levels. Between 20 and 50 km, where the line-of-sight elevation angles are retrieved, the error on the O_3 profile (<0.1 ppmv) estimated on pressure levels is significantly decreased compared to the error (0.2–0.7 ppmv) calculated on altitude levels. On the other hand, above 50 km where the line-of-sight angle is not retrieved, the pressure levels representation induced a larger error of 0.15–0.7 ppmv. The validation works on O_3 and HCl products on both vertical representations are currently under way. These studies should provide insight about the relative importance of the errors induced by the GEOS-5 pressure and by the line-of-sight elevation angles.

In the case of a small error on the line-of-sight angle derived from the altitude data, the pressure error at the tangent point can be derived from the retrieved tangent altitude

SMILES Level 2 research algorithms

P. Baron et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



using the hydrostatic equation (Eq. 8). Hence, the temperature profile, retrieved from the O_3 line center, and the line-of-sight angles, retrieved from the wings, provide complementary information about pressure. The combination of both sources of information to retrieve the pressure profile is currently under investigation.

6.4 HOCl retrieval

Two HOCl lines of similar intensity are measured at 624.378 GHz and 625.075 GHz (Fig. 1). The first line is measured in band A and the second is measured both in bands A and B. Although the line at 624.378 GHz is less contaminated by other spectral lines, the retrieval quality has been found lower than for the line at 625.075 GHz. Hence only the second line is used in the current processing.

The line is measured in windows A-w1, B-w1, A-w4 and B-w3 (Fig. 4). The same frequency range of ~ 200 MHz width is used for A-w4 and B-w3.

The a priori error on the HOCl profile is set to 100 % or 0.1 ppbv (whichever is greater) over the whole altitude range. The retrieval setting is the same as the one for A/B-w1 described in Sect. 6.2. For the inversion of A-w4 and B-w3, an altitude correlation of 6 km is used in the a priori covariance matrix. HOCl is retrieved simultaneously with H_2O_2 , $OO^{18}O$ and $O_3v1,3$. A quadratic baseline is retrieved to account for radiance offset induced by the instrument and the emission from the out-of-window lines. A mean frequency offset over the full scan is also retrieved using the relatively strong $O_3v1,3$ line. As the characteristics of band A windows are similar to those of band B windows, only the results for band A (A-w1, A-w4) will be discussed.

From the analysis of the averaging kernel matrix, HOCl profile is retrieved from window A-w1 between 25 and 60 km (Fig. 14, upper left panel) with a vertical resolution between 6 and 14 km (Fig. 14, upper right panel). The total random error on the HOCl retrieved profile (Fig. 15, upper left panel) is 0.05–0.09 ppbv between 25 and 40 km. The main error source is the measurement noise. Atmospheric parameters retrieved in previous processes also induce a significant random error of 0.03–0.05 ppbv. The systematic error (Fig. 15, upper right panel) found for window w1 is 0.05 ppbv at 25 km and

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



decreases to below 0.005 ppbv at 50 km. The line pressure-broadening parameters of nearby spectroscopic lines and the non-linear calibration gain are the main errors, with amplitudes between 0.01–0.04 ppbv.

From window A-w4, the vertical profile of HOCl is retrieved from 30 to 65 km (Fig. 14, lower panels). Hence, reducing the spectral range induces a truncation of the 25–30 km layer of the retrieval vertical range. Otherwise, the vertical resolution, the total random and total systematic errors have similar values to those found for the inversion of A-w1. It is important to note that for A-w4, the random error is mainly due to measurement noise. Contamination from other atmospheric profiles (temperature, pressure, O₃) is not significant (less than 0.02 ppbv). The systematic error is from the O₃v1,3 line pressure-broadening parameter. Errors from other lines and calibration are not significant (less than 0.01 ppbv)

Using a narrower frequency bandwidth clearly decreases the contamination from other spectral lines, but slightly degrades the sensitivity at lowest altitudes.

7 Conclusions

We have presented version 2 of the retrieval algorithms for the SMILES level-2 research processing chain. The retrieval procedure is based on sequentially dependent processes. In each process, a reduced spectral window is used with an optimised retrieval setting. The forward model and the inversion method have been presented. The algorithms have been designed for the altitude range between 18–100 km. It is not recommended to use the data retrieved below this range. The line-of-sight angles are retrieved between 20 and 50 km from the strong O₃ lines along with the temperature and the O₃ VMR profile. An error analysis has been conducted to show that the correlations between these parameters are low and that these parameters can effectively be retrieved. The pressure profile is found to be the limiting parameter of the precision for the O₃ profile and for the line-of-sight angles. However, the error induced by the pressure can significantly be decreased if the molecular VMR profiles are represented

SMILES Level 2 research algorithms

P. Baron et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



on pressure levels in the altitude range where the line-of-sight tangent altitudes are retrieved. Neglecting the non-linearity of the gain in the version 5 of the calibration procedure is the main systematic error. The next L2r version will use calibrated radiances including this effect.

5 An error analysis for the HOCl retrieved profile has been presented to illustrate the inversion of weak lines. It is shown that using narrow spectral windows around the line of interest allows to reduce the contamination from other atmospheric parameters, neighbouring spectroscopic lines and calibration errors.

10 Temperature is retrieved with low accuracy and precision and must be improved in future versions. Better calibration procedure and AOS channel response should increase the accuracy. Current works investigate ways to increase the temperature precision using a new regularisation scheme in the inversion calculation, and by joining the strong HCl and O₃ lines in the same retrieval process.

15 Works are also being conducted to derive reliable informations in the UT/LS about molecular abundances (H₂O, O₃ and HCl) and on ice content. The retrieval of horizontal wind in the stratosphere and mesosphere along the line-of-sight direction, is also under investigation.

Appendix A AOS filter shape

20 The AOS channel response function parametrisation in version 2 of the L2r chain has been provided before launch by the instrument teams. For both AOS units, the response function $g^{\text{AOS}}(\nu)$ is defined by three Gaussian functions:

$$g^{\text{AOS}}(\nu) = \sum_{i=1,3} \frac{A_i}{w_i \sqrt{2\pi}} \exp \left[-2 \left(\frac{\nu - x_{0,i}}{w_i} \right)^2 \right], \quad (\text{A1})$$

where ν is the frequency in MHz.

SMILES Level 2 research algorithms

P. Baron et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



The amplitude (A_i), the width in MHz (w_i) and the center in MHz (x_i) are computed for each channel $j = 1 \dots 1728$ using polynomial coefficients C_p

$$X[j] = \sum_{p=0,4} C_p \cdot (j - 1)^p, \quad (\text{A2})$$

where X can be one of the Gaussian parameters A_i or w_i or x_i . The values of the coefficients C_p are given in Table 6.

Large errors on the AOS filter shape have been identified from the analysis of retrieved temperature or line-of-sight angles from spectra measured in the upper stratosphere. Ozeki et al. (2011) have estimated that the channel width (w_i) of AOS units 1 and 2 should be multiplied by 0.7 and 1.1, respectively. These corrections are applied in the version 2 of the L2r chain. The multiplicative factors have been derived from the temperature retrieval and, thus, are representative of errors on channels close to the strong O_3 line center. Outside of this spectral domain the response function remains uncertain.

The response function is calculated for each channel on a frequency grid of 13 MHz width, sampled in 0.1 MHz steps within 2.5 MHz range from the channel center and in 0.4 MHz steps outside. Note that the response function is not symmetric and that the channel frequency calculated from the comb spectrum is assumed to correspond to the mean frequency over the channel 13 MHz bandwidth weighted by the response function.

Appendix B Side band filter

The upper and lower sideband rejection ratios (Eq. 1) are calculated using the equation (Ochiai et al., 2008):

$$R^X(\nu) = m^X \left(\nu - \nu_0^X \right)^2 + a^X \quad (\text{B1})$$

SMILES Level 2 research algorithms

P. Baron et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



where $X = \text{LSB or USB}$. The value for each parameter is given in Table 6.

The sideband rejection function depends on the temperature of the optics that varies between 16–22 °C. The image band contamination is less than 1 % and the estimation of its intensity is done with less accuracy than in the main band, in order to minimize the CPU consumption.

Appendix C

Radiometric gain compression error

The raw radiometer outputs C (ADU) depend on the input signal T (K) as follows (Ochiai et al., 2011):

$$C = G (1 - \alpha \langle C \rangle) (T_{\text{rec}} + T), \quad (\text{C1})$$

where G is the radiometric gain, $\alpha = 1.515 \times 10^{-6}$ is the gain compression, $\langle C \rangle$ is the mean value of the AOS output and $T_{\text{rec}} = 300$ K is the receiver temperature. The value of the gain G is set in order to give a cold load AOS output of $C_c = 14\,500$ ADU, a typical value for SMILES measurements. The cold load signal is the brightness temperature of the cold sky, $T_c = 4 \times 10^{-4}$ K.

In order to estimate the error caused by neglecting the gain compression factor, simulated atmospheric brightness temperatures are converted to AOS output using Eq. (C1). The brightness temperature T_{1b} as given in version 5 of the level-1b data is calculated by converting the AOS counts while neglecting the gain compression:

$$T_{1b} = \frac{T_h - T_c}{C_h - C_c} \times (C - C_c) + T_c \quad (\text{C2})$$

where $T_h = 275$ K is the hot load brightness temperature and C_h is the hot load AOS output calculated using Eq. (C1).

Acknowledgements. Authors would like to thank S. Mizobuchi, K. Muranaga and S. Usui from Systems Engineering Consultants Co. (SEC) for their contribution to the development of the SMILES ground system in NICT. The work presented in the paper has been performed in close collaboration with the SMILES level 2 operational team in JAXA/ISAS: K. Imai, C. Mitsuda, T. Sano, M. Suzuki and C. Takahashi. We would also like to thank N. Livesey, W. Read and D. Wu from the MLS team for fruitful discussions, especially the ones about line-of-sight pointing correction.

References

- Baron, P., Merino, F., and Murtagh, D.: Simultaneous Retrievals of Temperature and Volume Mixing Ratio Constituents from Nonoxygen Odin Submillimeter Radiometer Bands, *Appl. Optics*, 40, 6102–6110, 2001. 3600
- Baron, P., Ricaud, P., de La Noë, J., Eriksson, P., Merino, F., Ridal, M., and Murtagh, D. P.: Studies for the Odin Sub-Millimetre Radiometer: II. Retrieval Methodology, *Can. J. Phys.*, 80, 341–356, 2002. 3608
- Baron, P., Mendrok, J., Kasai, Y., Ochiai, S., Seta, T., Sagi, K., Suzuki, K., Sagawa, H., and Urban, J.: AMATERASU: Advanced Model for Atmospheric TERahertz Radiation Analysis and Simulation, *Journal of the National Institute of Information and Communications Technology*, 55(1), 109–121, 2008. 3601
- Boissoles, J., Boulet, C., Tipping, R., Brown, A., and Ma, Q.: Theoretical calculation of the translation-rotation collision-induced absorption in N_2-N_2 , O_2-O_2 , and N_2-O_2 pairs, *J. Quant. Spectrosc. Ra.*, 82, 505–516, doi:10.1016/S0022-4073(03)00174-2, 2003. 3603
- Carlotti, M. and Rodolfi, M.: Derivation of temperature and pressure from submillimetric limb observations, *Appl. Optics*, 38, 2398–2409, 1999. 3607
- Ekström, M., Eriksson, P., Rydberg, B., and Murtagh, D. P.: First Odin sub-mm retrievals in the tropical upper troposphere: humidity and cloud ice signals, *Atmos. Chem. Phys.*, 7, 459–469, doi:10.5194/acp-7-459-2007, 2007. 3599
- Hedin, A.: Extension of the MSIS Thermosphere Model into the Middle and Lower Atmosphere, *J. Geophys. Res.*, 96, 1159–1172, 1991. 3605

AMTD

4, 3593–3645, 2011

SMILES Level 2 research algorithms

P. Baron et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



SMILES Level 2 research algorithms

P. Baron et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Kikuchi, K. and Fujii, Y.: Flight Model Performance of 640-GHz Superconductor-Insulator-Superconductor Mixers for JEM/SMILES Mission, *Journal Infrared Millim. W.*, 31, 1205–1211, 2010. 3598

Kikuchi, K., Nishibori, T., Ochiai, S., Ozeki, H., Irimajiri, Y., Kasai, Y., Koike, M., Manabe, T., Mizukoshi, K., Murayama, Y., Nagahama, T., Sano, T., Sato, R., Seta, M., Takahashi, C., Takayanagi, M., Masuko, H., Inatani, J., Suzuki, M., and Shiotani, M.: Overview and Early Results of the Superconducting Submillimeter-Wave Limb-Emission Sounder (SMILES), *J. Geophys. Res.*, 115, D23306, doi:10.1029/2010JD014379, 2010. 3596

Livesey, N. J., Snyder, W., Read, W., and Wagner, P.: Retrieval algorithms for the EOS Microwave Limb Sounder (MLS) instrument, *IEEE T. Geosci. Remote*, 44, 1144–1155, 2006. 3596

Marks, C. J. and Rodgers, C. D.: A Retrieval Method for Atmospheric Composition from Limb Emission Measurements, *J. Geophys. Res.*, 98(D8), 14939–14953, doi:10.1029/93JD01195, 1993. 3608

Mendrok, J., Baron, P., and Kasai, Y.: Studying the potential of terahertz radiation for deriving ice cloud microphysical information, vol. 7107, , *Remote Sensing of Clouds and the Atmosphere XIII*, Proceedings of SPIE, doi:10.1117/12.800262, 710704p., 2008. 3599

Murtagh, D. P., Frisk, U., Merino, F., Ridal, M., Jonsson, A., Stegman, J., Witt, G., Eriksson, P., Jiménez, C., Mégie, G., de La Noë, J., Ricaud, P., Baron, P., Pardo, J. R., Hauchecorne, A., Llewellyn, E. J., Degenstein, D. A., Gattinger, R. L., Lloyd, N. D., Evans, W. F. J., McDade, I. C., Haley, C. S., Sioris, C., von Savigny, C., Solheim, B. H., McConnell, J. C., Strong, K., Richardson, E. H., Leppelmeier, G. W., Kyrölä, E., Auvinen, H., and Oikarinen, L.: An Overview of the Odin Atmospheric Mission, *Can. J. Phys.*, 80, 309–318, 2002. 3596

Ochiai, S., Nishibori, T., Ozeki, H., Kikuchi, K., and Manabe, T.: Superconducting Submillimeter-Wave Limb-Emission Sounder on the International Space Station I: Radiometric and Spectral Calibration and Data Processing., *Journal of the National Institute of Information and Communications Technology*, 55(1), 83–94, 2008. 3619

Ochiai, S., Kikuchi, K., Nishibori, T., Manabe, T., Ozeki, H., Mizukoshi, K., Ohtsubo, F., Tsubosaka, K., Irimajiri, Y., and R. Sato, M. S.: Performance of JEM/SMILES in orbit, *Proceedings on 21st International Symposium on Space Terahertz Technology*, 179p., 2010. 3597

Ochiai, S., Kikuchi, K., Nishibori, T., Mizobuchi, S., Manabe, T., Mitsuda, C., and Baron, P.: Gain nonlinearity calibration of the SMILES receiver, *IEEE International Geoscience and Remote Sensing Symposium*, Sendai, <http://igarss11.org/>, last access: 1 June, 2011. 3610, 3620

**SMILES Level 2
research algorithms**

P. Baron et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



- Ozeki, H., Mizobuchi, S., Mitsuda, C., Sano, T., Suzuki, M., and Shiotani, M.: Response characteristics of radio spectrometers of the Superconducting Submillimeter-wave Limb-Emission Sounder (JEM-SMILES), IEEE International Geoscience and Remote Sensing Symposium, Sendai, <http://igarss11.org/>, last access: 1 June, 2011. 3619
- 5 Pardo, J. R., Serabyn, E., and Cernicharo, J.: Submillimeter atmospheric transmission measurements on Mauna Kea during extremely dry El Niño conditions: implications for broadband opacity contributions, *J. Quant. Spectrosc. Ra.*, 68, 419–433, doi:10.1016/S0022-4073(00)00034-0, 2001. 3603
- Pickett, H. M., Poynter, R. L., Cohen, E. A., Delitsky, M. L., Pearson, J. C., and Müller, H. S. P.: Submillimeter, millimeter, and microwave spectral line catalog, *J. Quant. Spectrosc. Ra.*, 60, 883–890, doi:10.1016/S0022-4073(98)00091-0, 1998. 3604
- 10 Read, W. G., Shippony, Z., Schwartz, M. J., Livesey, N. J., and Snyder, W. V.: The clear-sky unpolarized forward model for the EOS aura microwave limb sounder (MLS), *IEEE T. Geosci. Remote*, 44, 1367–1379, doi:10.1109/TGRS.2006.873233, 2006. 3596
- 15 Reinecker, M.: The GEOS-5 data assimilation system: A documentation of GEOS-5.0, Tech Report 104606 V27 (NASA), 2008. 3600
- Rodgers, C. D.: *Inverse Methods for Atmospheric Sounding: Theory and Practise*, vol. 2 of Series on Atmospheric, Oceanic and Planetary Physics, World Scientific, 2000. 3605, 3606, 3609
- 20 Rothman, L. S., Gordon, I. E., Barbe, A., Benner, D. C., Bernath, P. F., Birk, M., Boudon, V., Brown, L. R., Campargue, A., and Champion, J. P.: The HITRAN 2008 molecular spectroscopic database, *J. Quant. Spectrosc. Ra.*, 110, 533–572, doi:10.1016/j.jqsrt.2009.02.013, 2009. 3604
- Rüeger, J. M.: *Refractive Index Formulae for Radio Waves*, FIG XXII International Congress Washington DC, http://www.fig.net/pub/fig_2002/Js28/JS28_rueger.pdf (last access: 1 June 2011), 2002. 3603
- 25 Schreier, F. and Kohlert, D.: Optimized implementations of rational approximations, a case study on the Voigt and complex error function, *Comput. Phys. Commun.*, 179, 457–465, doi:10.1016/j.cpc.2008.04.012, 2008. 3603
- 30 Shiotani, M., Masuko, H., and the SMILES Science Team: JEM/SMILES Mission Plan, Version 2.1, Tech. rep., National Space Development Agency (NASDA) and Communications Research Laboratory (CRL), <http://smiles.tksc.jaxa.jp/document/indexe.shtml> (last access: 1 June 2011), 2002. 3602, 3611

- Takahashi, C., Ochiai, S., and Suzuki, M.: Operational retrieval algorithms for JEM/SMILES level 2 data processing system, *J. Quant. Spectrosc. Ra.*, 111, 160–173, doi:10.1016/j.jqsrt.2009.06.005, 2010. 3596
- Urban, J., Baron, P., Lautié, N., Schneider, N., Dassas, K., Ricaud, P., and de La Noë, J.: Moliere (v5): a versatile forward- and inversion model for the millimeter and sub-millimeter wavelength range, *J. Quant. Spectrosc. Ra.*, 83, 529–554, 2004. 3601
- Urban, J., Lautié, N., Le Flochmoën, E., Jiménez, C., Eriksson, P., de La Noë, J., Dupuy, E., Ekström, M., Amraoui, L. E., Frisk, U., Murtagh, D., Olberg, M., and Ricaud, P.: Odin/SMR limb observations of stratospheric trace gases: Level 2 processing of ClO, N₂O, HNO₃, and O₃, *J. Geophys. Res.*, 110, D14307, doi:10.1029/2004JD005741, 2005. 3596
- Waters, J. W., Froidevaux, L., Harwood, R. S., Jarnot, R. F., Pickett, H. M., Read, W. G., Siegel, P. H., Cofield, R. E., Filipiak, M. J., Flower, D. A., Holden, J. R., Lau, G. K., Livesey, N. J., Manney, G. L., Pumphrey, H. C., Santee, M. L., Wu, D. L., Cuddy, D. T., Lay, R. R., Loo, M. S., Perun, V. S., Schwartz, M. J., Stek, P. C., Thurstans, R. P., Boyles, M. A., Chandra, K. M., Chavez, M. C., Chen, G.-S., Chudasama, B. V., Dodge, R., Fuller, R. A., Girard, M. A., Jiang, J. H., Jiang, Y., Knosp, B. W., LaBelle, R. C., Lam, J. C., Lee, K. A., Miller, D., Oswald, J. E., Patel, N. C., Pukala, D. M., Quintero, O., Scaff, D. M., Snyder, W. V., Tope, M. C., Wagner, P. A., and Walch, M. J.: The Earth Observing System Microwave Limb Sounder (EOS MLS) on the Aura satellite, *IEEE T. Geosci. Remote*, 44, 1075–1092, doi:10.1109/TGRS.2006.873771, 2006. 3596
- Wu, D. L., Pickett, H. M., and Livesey, N. J.: Aura MLS THz Observations of Global Cirrus Near the Tropopause, *Geophys. Res. Lett.*, 35, L15803, doi:10.1029/2008GL034233, 2008. 3599

AMTD

4, 3593–3645, 2011

SMILES Level 2 research algorithms

P. Baron et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



**SMILES Level 2
research algorithms**

P. Baron et al.

Table 1. Characteristics of the SMILES antenna and the observation sequence.

Antenna size	400 × 200 mm
Antenna pattern (vertical full width half maximum)	0.09° (~4 km at the limb)
Total scan duration	53 s
Atmospheric scan duration	30.5 s
Vertical velocity	0.1125° s ⁻¹ (upward direction)
Spectrum integration time	0.5 s
Typical altitude coverage	–10 to 90 km (60 spectra)
Scans per day	~1630

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

I◀

▶I

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



SMILES Level 2 research algorithms

P. Baron et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Table 2. SMILES L2 research data produced by the version-2 algorithms. The products list for each process or window is given along with the frequency range and the line-of-sight altitude range. The actual vertical range for a good retrieval depends on the signal strength.

Window/Process name	Frequency	Products	Line-of-sight tangent height (km)
A-w0	625.042–625.612	Line of sight elevation angle	18–70
A-w1	625.042–625.612	Temperature, O ₃ , OO ¹⁸ O	18–100
A-w2	624.445–625.040	H ³⁷ Cl, HNO ₃ , BrO	18–100
A-w3	624.35–624.900	BrO, HNO ₃ , CH ₃ CN, O ¹⁸ OO	25–80
A-w4	625.015–625.185	HOCl, OO ¹⁸ O, H ₂ O ₂	25–80
A-w5	625.500–625.612	OO ¹⁸ O*	25–80
A-w6	624.265–624.642	O ¹⁷ OO, HNO ₃	20–70
A-w7	625.132–625.232	HOBr*	20–70
A-w8*	Full band	O ₃ , H ³⁷ Cl, BrO, HNO ₃ , CH ₃ CN, H ₂ O	11–35
B-w0	625.042–625.612	Line of sight elevation angle	18–70
B-w1	625.042–625.612	Temperature, O ₃ , OO ¹⁸ O	18–100
B-w2	625.714–626.264	H ³⁵ Cl, O ¹⁷ OO	16–100
B-w3	625.015–625.185	HOCl, OO ¹⁸ O, H ₂ O ₂	25–90
B-w4	625.500–625.830	HO ₂ , OO ¹⁸ O, O ¹⁷ OO	20–90
B-w5	625.130–625.230	HOBr*	25–80
B-w6*	Full band	O ₃ , HNO ₃ , H ³⁵ Cl, H ₂ O	11–35
C-w0*	Full band	O ₃ , ClO, HO ₂ , HNO ₃ , OO ¹⁸ O, OO ¹⁷ O, BrO, H ₂ O	11–40
C-w1	649.882–650.382	BrO, HNO ₃ , OO ¹⁷ O	18–90
C-w2	649.500–649.900	HO ₂ , O ¹⁷ OO	25–90
C-w3	649.232–649.632	ClO, OO ¹⁷ O	15–80

The * indicates data that are not recommended for use.

SMILES Level 2 research algorithms

P. Baron et al.

Table 3. Summary of the a priori information used in the a priori covariance matrix (Eq. 6). Errors and correlations are not representative of the real data, but are inversion regularisation parameters. Values for O₃ are given for the inversion of the 625.371 GHz line and those for H₂O are for the full spectral band inversion.

	origin	error	correlation	Confidence level
Line-of-sight elevation angles	ISS attitudes	0.02°	No	medium
Scan frequency offset	Comb spectra	0.02 MHz	No	high
Temperature below 60 km	GEOS-5	5 K	6 km	high below 30 km, medium above
Temperature above 60 km	MSIS	5 K	6 km	low
H ₂ O	GEOS-5	5 ppmv	6 km	high below 15 km, low above
O ₃	GEOS-5	5 ppmv	3 km	medium
HCl	US standard	>50 %	4 km	low
other species	climatology	signal strength dependent	3–6 km	low

[Title Page](#)
[Abstract](#)
[Introduction](#)
[Conclusions](#)
[References](#)
[Tables](#)
[Figures](#)
[◀](#)
[▶](#)
[◀](#)
[▶](#)
[Back](#)
[Close](#)
[Full Screen / Esc](#)
[Printer-friendly Version](#)
[Interactive Discussion](#)


SMILES Level 2 research algorithms

P. Baron et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Table 4. Uncertainties assumed for single profile error estimation. The name of the parameters and the labels used for their identification in the figures are given in the parenthesis in the first column. The parameter γ is the e line pressure-broadening parameter.

Random errors	
O ₃ VMR (O ₃)	10 % of the a priori profile
HCl VMR (HCl)	10 % of the a priori profile
Temperature (Tp)	5 K
Pressure (Pr)	5 % of the a priori profile
Line of sight angles (LOS)	0.007° (300 m)
Measurement noise (y-noise)	0.5 K
Systematic errors	
Calibration offset (CAL0)	1 K
Calibration gain (CAL1)	1 %
Calibration gain compression α (CALN)	1.515×10^{-6}
O ₃ – γ at 625.371 GHz (γ –O ₃)	2 %
H ³⁵ Cl- γ at 625.901 GHz (γ -35)	5 %
H ³⁷ Cl- γ at 624.964 GHz (γ -37)	5 %
O ₃ v1,3- γ at 625.051 GHz (γ -v1,3)	5 %
OO ¹⁸ O- γ at 625.091 GHz (γ -18 (1))	5 %
OO ¹⁸ O- γ at 625.563 GHz (γ -18 (2))	5 %
dry air continuum (N ₂)	20 %
Image band (IMB)	ON-OFF
AOS filter width (AOS)	10 %

SMILES Level 2 research algorithms

P. Baron et al.

Table 5. Polynomial coefficients used to calculate the channel response function for AOS units 1 and 2 (Eqs. A1 and A2).

	$C_{0,\dots,4}$ for unit 1					$C_{0,\dots,4}$ for unit 2				
w_1	0.710	$-8.02\text{e-}5$	$2.40\text{e-}7$	$-1.11\text{e-}10$	0.	0.699	$3.84\text{e-}4$	$-7.31\text{e-}7$	$5.67\text{e-}10$	$-1.55\text{e-}13$
w_2	1.438	$-4.88\text{e-}4$	$1.74\text{e-}6$	$-2.02\text{e-}9$	$7.48\text{e-}13$	2.021	$-2.77\text{e-}3$	$4.64\text{e-}6$	$-3.29\text{e-}9$	$8.64\text{e-}13$
w_3	7.510	$-2.20\text{e-}2$	$5.02\text{e-}5$	$-4.38\text{e-}8$	$1.27\text{e-}11$	5.532	$-8.69\text{e-}3$	$1.75\text{e-}5$	$-1.48\text{e-}8$	$4.33\text{e-}12$
A_1	0.256	$1.93\text{e-}3$	$-6.34\text{e-}6$	$6.37\text{e-}9$	$-1.90\text{e-}12$	0.911	$-1.01\text{e-}3$	$1.03\text{e-}6$	$-2.83\text{e-}10$	0.
A_2	1.238	$-3.63\text{e-}3$	$1.21\text{e-}5$	$-1.21\text{e-}8$	$3.61\text{e-}12$	0.137	$1.67\text{e-}3$	$-1.67\text{e-}6$	$4.52\text{e-}10$	0.
A_3	0.169	$5.94\text{e-}6$	$-4.26\text{e-}8$	0.	0.	0.044	$2.06\text{e-}4$	$-1.97\text{e-}7$	$4.97\text{e-}11$	0.
x_1	-0.115	$-6.39\text{e-}5$	$1.88\text{e-}7$	$-6.29\text{e-}11$	0.	0.021	$-1.27\text{e-}4$	$1.17\text{e-}7$	$-2.82\text{e-}11$	0.
x_2	0.138	$-7.04\text{e-}5$	$-1.73\text{e-}8$	0.	0.	-0.165	$1.17\text{e-}3$	$-2.1\text{e-}6$	$1.59\text{e-}9$	$-4.34\text{e-}13$
x_3	-0.872	$1.35\text{e-}3$	$-1.32\text{e-}6$	0.	0.	-2.416	$3.36\text{e-}3$	$-2.78\text{e-}6$	$5.47\text{e-}10$	0.

[Title Page](#)
[Abstract](#)
[Introduction](#)
[Conclusions](#)
[References](#)
[Tables](#)
[Figures](#)
[I◀](#)
[▶I](#)
[◀](#)
[▶](#)
[Back](#)
[Close](#)
[Full Screen / Esc](#)
[Printer-friendly Version](#)
[Interactive Discussion](#)


SMILES Level 2 research algorithms

P. Baron et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Table 6. Side band response parameters for the lower side band (LSB) and upper side band (USB) (Eq. B1). The parameters a and ν_0 vary with the temperature of the Ambient Temperature Optics (AOP).

	Lower side band (LSB)	Upper side band (USB)
m	0.00398	0.00470
ν_0 (GHz)	$-2.888012 \times 10^{-4} T_{\text{AOP}}^2 + 0.0253396 T_{\text{AOP}} + 624.75733$	$0.0085865 T_{\text{AOP}} + 648.75572$
a	$-2.90103 \times 10^{-7} T_{\text{AOP}} + 0.00003150$	$-3.30717 \times 10^{-7} T_{\text{AOP}} + 0.00006756$

SMILES Level 2 research algorithms

P. Baron et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion

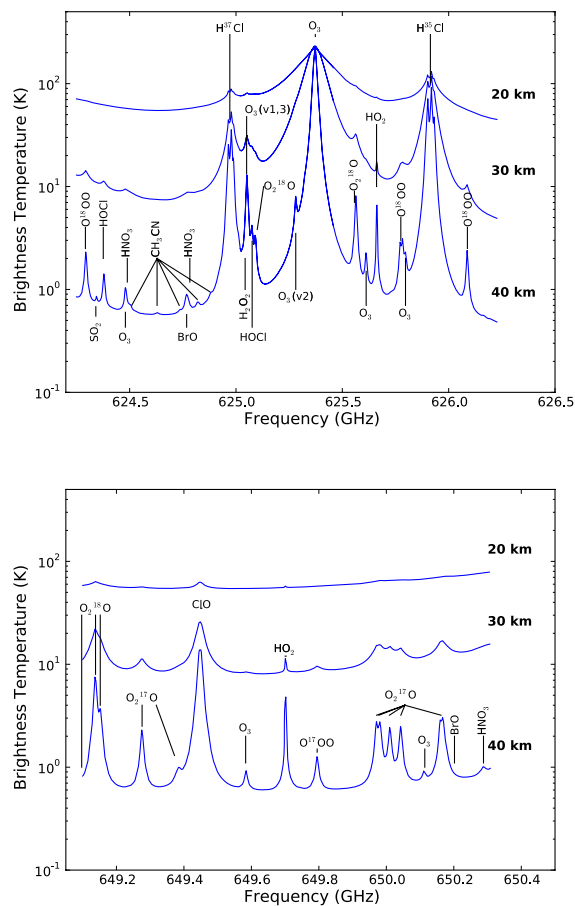


Fig. 1. Spectroscopic lines from simulated limb radiances in bands A and B (upper panel) and in band C (lower panel). The line-of-sight tangent heights are 20, 30 and 40 km.

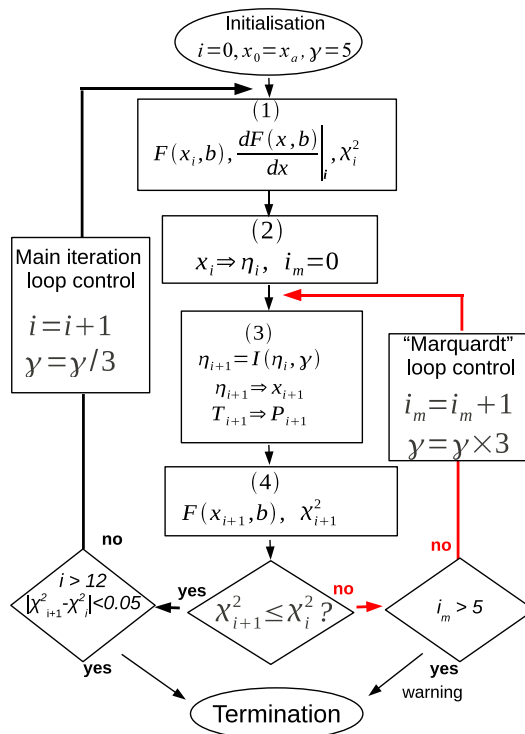


Fig. 2. Flowchart of the iterative inversion calculation. Step 1: the forward model and its Jacobian matrix, and the cost function (Eq. 2) are computed. Step 2: the retrieved parameters are scaled (Eq. 4) and the Marquardt loop counter is set to 0. Step 3: the inversion is performed (Eq. 5), the retrieved parameters are unscaled, and the pressure is derived from the retrieved temperature (Eq. 8). Step 4: the forward model and the cost function are estimated with the last estimate of the parameters. If the cost function decreases, the path is indicated by the black branch indicates the Gauss-Newton iteration loop including the decrease of the Levenberg-Marquardt parameter value. Otherwise, the Marquardt loop branch is used (red branch) where the Marquardt parameter γ is increased.

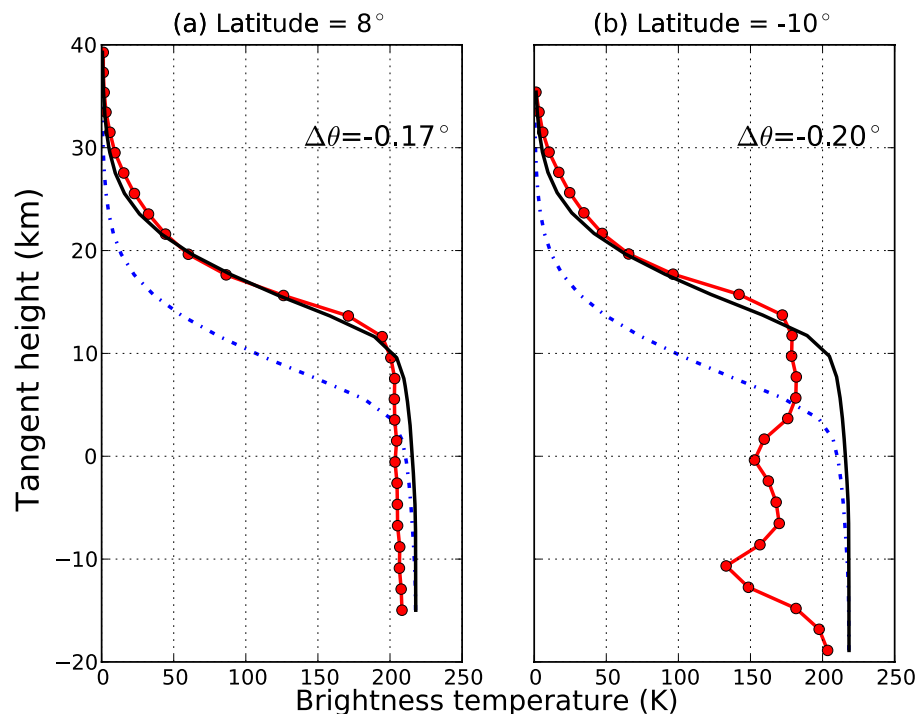


Fig. 3. Measured brightness temperature (circles) with respect to corrected tangent heights at 624.547 GHz: **(a)** clear sky case for a latitude of 8° N, and **(b)** for a latitude of 10° S with scattering ice particles. The black line is a calculation using the line-of-sight tangent altitude corrected before the retrieval calculation and the dashed line is the calculation on the original line-of-sight tangent altitude. The correction is -0.17° (about 6 km) for case **(a)** and -0.19° (about 7 km) for case **(b)**. Data are two single scans measured on 14 April 2010.

SMILES Level 2 research algorithms

P. Baron et al.

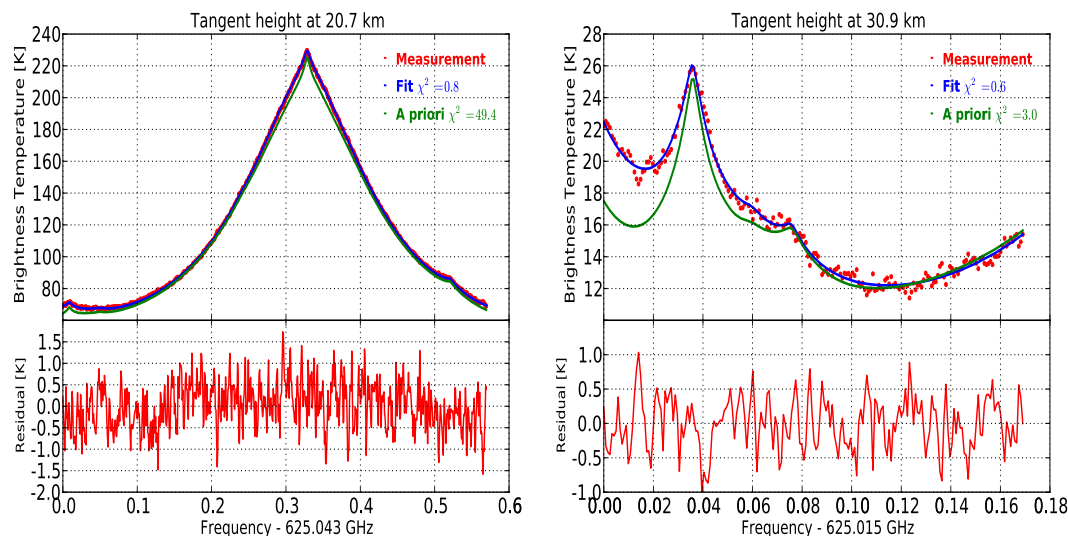


Fig. 4. Left panel: spectral line of O_3 at 625.371 GHz for a tangent height of 21 km measured in the window A-w1 along with the a priori and fitted spectra. The lower panel shows the residual of the fit. Right panel: Spectral window A-w4 for a tangent height of 31 km (upper panel) and fit residual (lower panel). The weak HOCl line at 625.076 GHz is located between two stronger lines of $O_3 v1,3$ and $OO^{18}O$ at 625.051 GHz and 625.091 GHz, respectively. Data are from a scan measured at 24:00 LT on 14 April 2010 at a latitude of 8° N.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



**SMILES Level 2
research algorithms**

P. Baron et al.

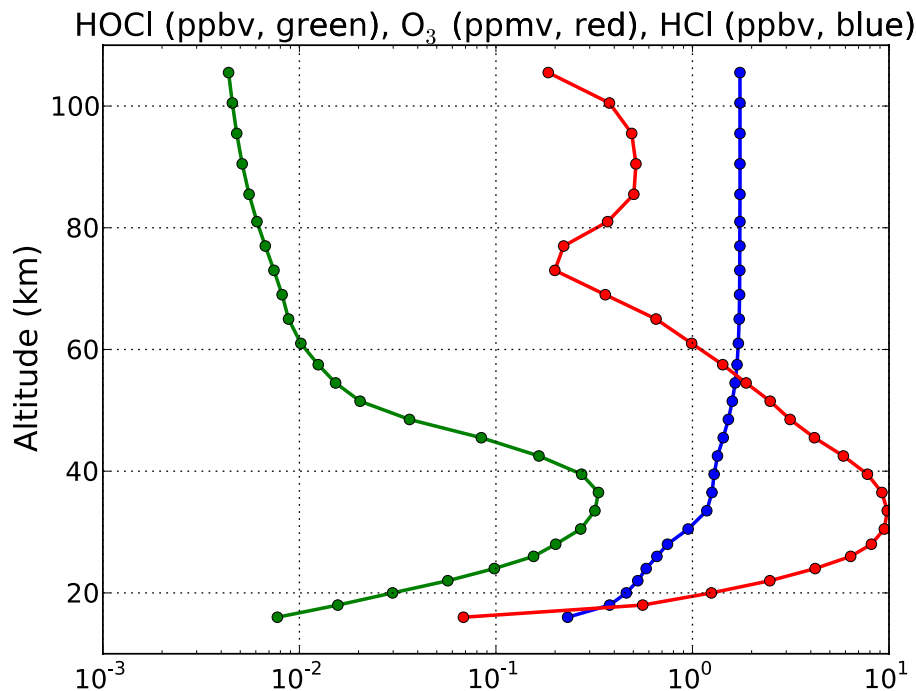


Fig. 5. VMR profiles of HOCl (green, ppbv), O₃ (red, ppmv) and HCl (blue, ppbv) used for the sensitivity analysis.

[Title Page](#)[Abstract](#)[Introduction](#)[Conclusions](#)[References](#)[Tables](#)[Figures](#)[◀](#)[▶](#)[◀](#)[▶](#)[Back](#)[Close](#)[Full Screen / Esc](#)[Printer-friendly Version](#)[Interactive Discussion](#)

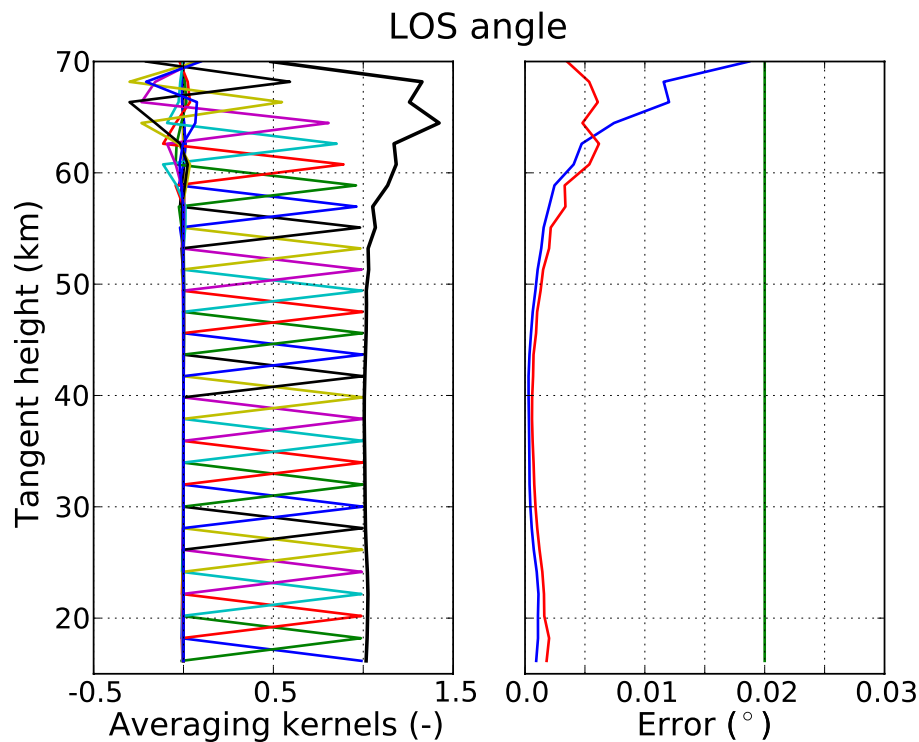


Fig. 6. Left panel: averaging kernels and measurement response (black line) for the retrieved line-of-sight elevation angle as a function of the tangent height. Right panel: line-of-sight angle measurement error (red line) and smoothing error (blue line) estimated by linear mapping (Eq. 9). The green line indicates the a priori error.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



**SMILES Level 2
research algorithms**

P. Baron et al.

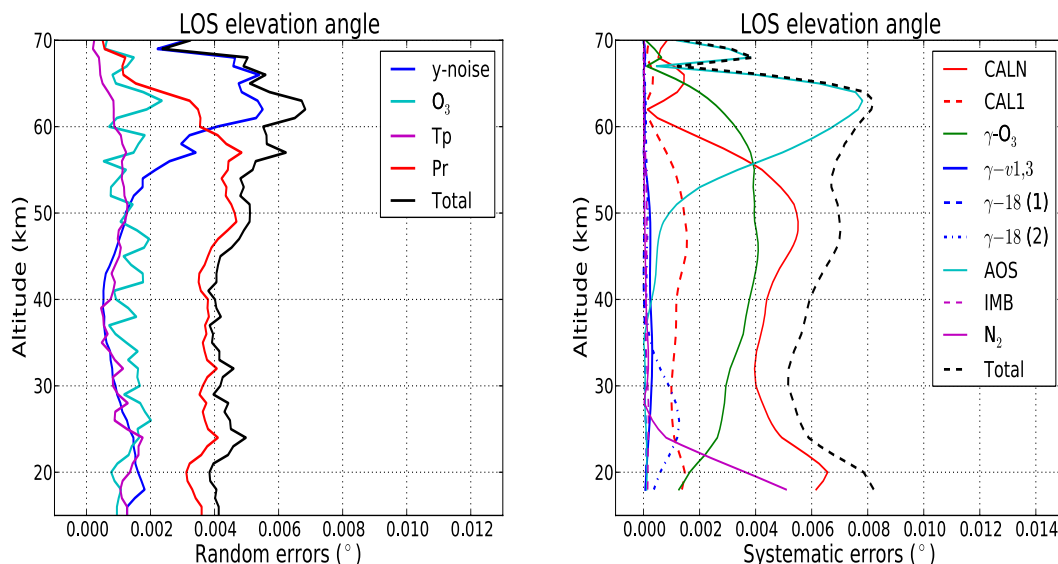


Fig. 7. Assessment of errors on the retrieved line-of-sight elevation angles from window A/B-w0. The random and systematic errors are shown in the left and right panels, respectively. The meaning of the labels and the assumed errors on the parameters are given in Table 4. The black line is the total error calculated as the root-sum-square of all sources of error.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



**SMILES Level 2
research algorithms**

P. Baron et al.

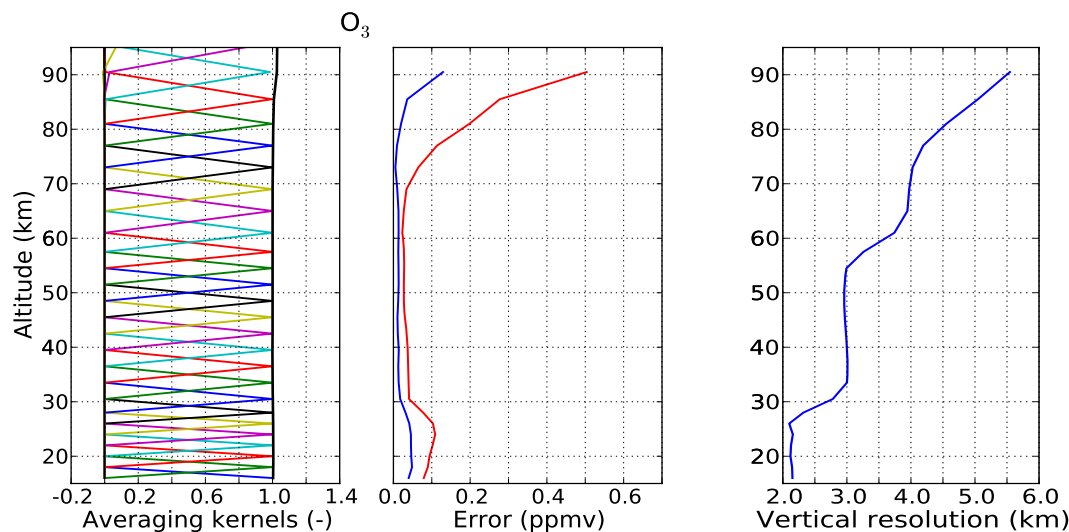


Fig. 8. Results for the O_3 profile retrieved from window A/B-w1. Left and central panels: same representation as left and right panels of Fig. 6. Right panel: vertical resolution.

[Title Page](#)[Abstract](#)[Introduction](#)[Conclusions](#)[References](#)[Tables](#)[Figures](#)[I◀](#)[▶I](#)[◀](#)[▶](#)[Back](#)[Close](#)[Full Screen / Esc](#)[Printer-friendly Version](#)[Interactive Discussion](#)

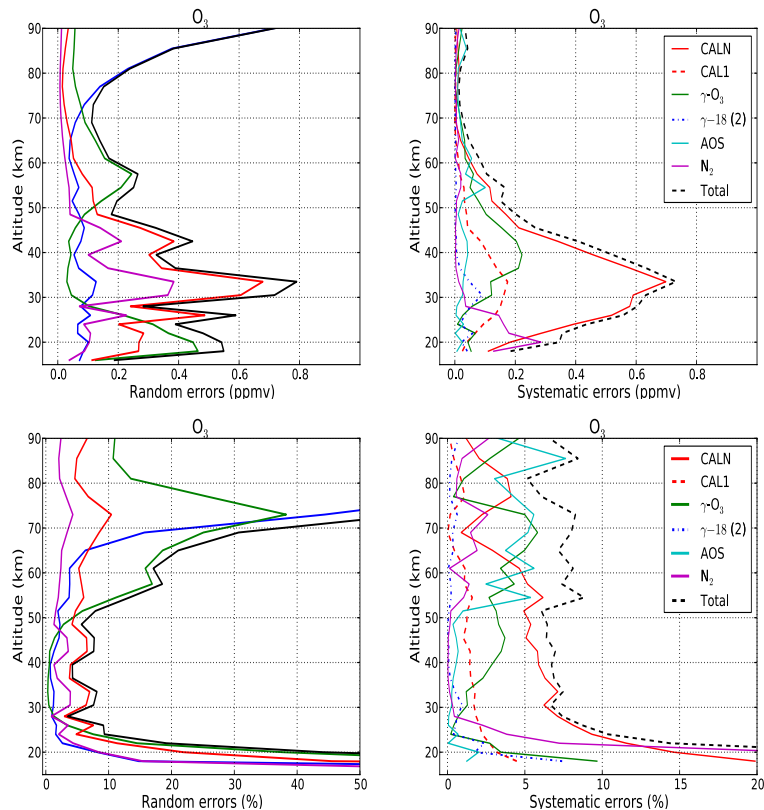


Fig. 9. Random (left panels) and systematic (right panels) errors on the O_3 profile retrieved from window A/B-w1. The absolute and relative errors are shown in the upper and lower panels, respectively. Random errors are from the measurement noise (blue line), temperature profile (magenta line), pressure profile (red line), line-of-sight angle (green) and the total random error (black line). The meaning of the labels of the systematic errors and the assumed errors on the parameters are given in Table 4. The black line is the total error calculated as the root-sum-square of all sources of error.

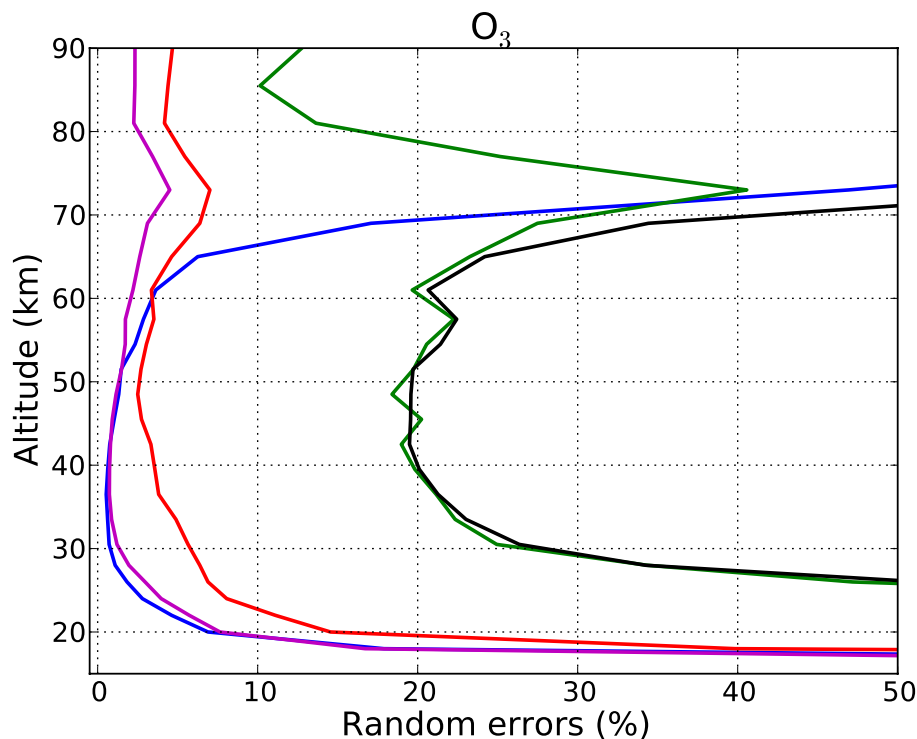


Fig. 10. Most significant random errors on a single O_3 profile retrieved from A/B-w1 if the line-of-sight angles are not retrieved. The errors from the instrument noise (blue line), temperature (magenta), pressure (red) and line-of-sight angles (green line) are shown. The assumed uncertainties are given in Table 4.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



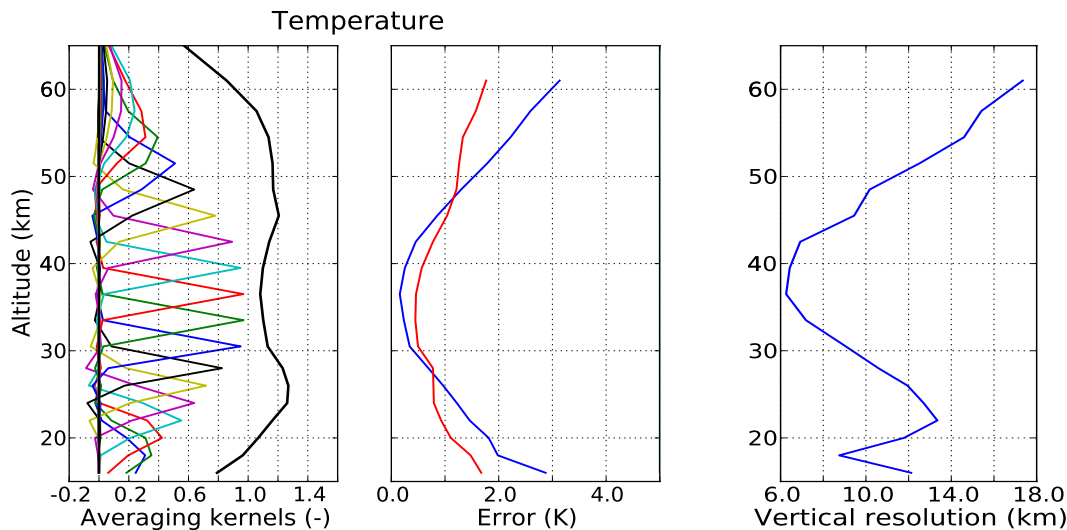


Fig. 11. Same as Fig. 8 but for the retrieved temperature profile.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



SMILES Level 2 research algorithms

P. Baron et al.

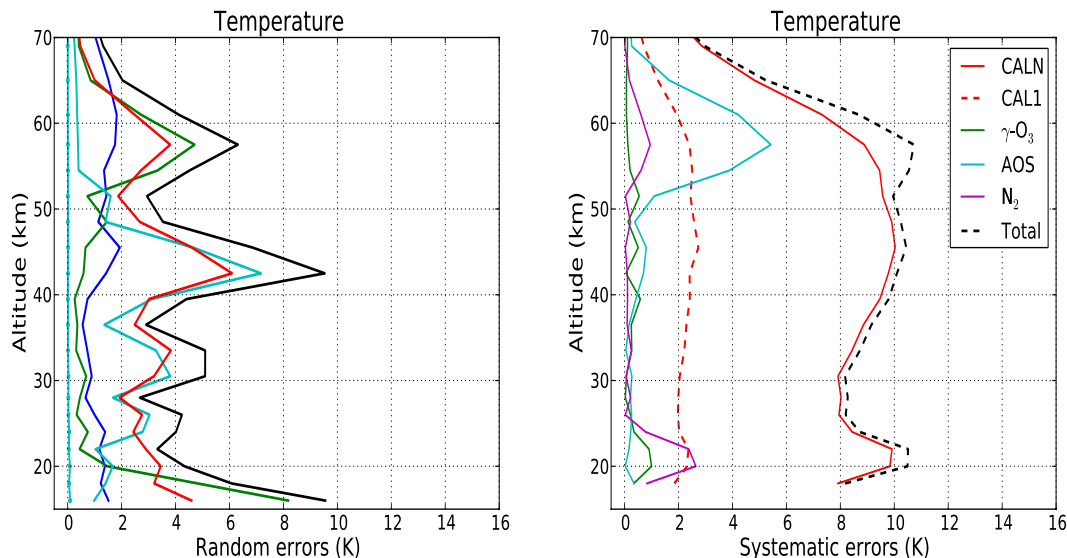


Fig. 12. Random (left panel) and systematic (right panel) errors on the temperature profile retrieved from window A/B w1. Random errors are from the measurement noise (blue line), O₃ (cyan line), line-of-sight angle (green), the pressure profile (red line). The black line is the total error calculated as the root-sum-square of all sources of error. The meaning of the labels of the systematic errors and the assumed errors on the parameters are given in Table 4.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



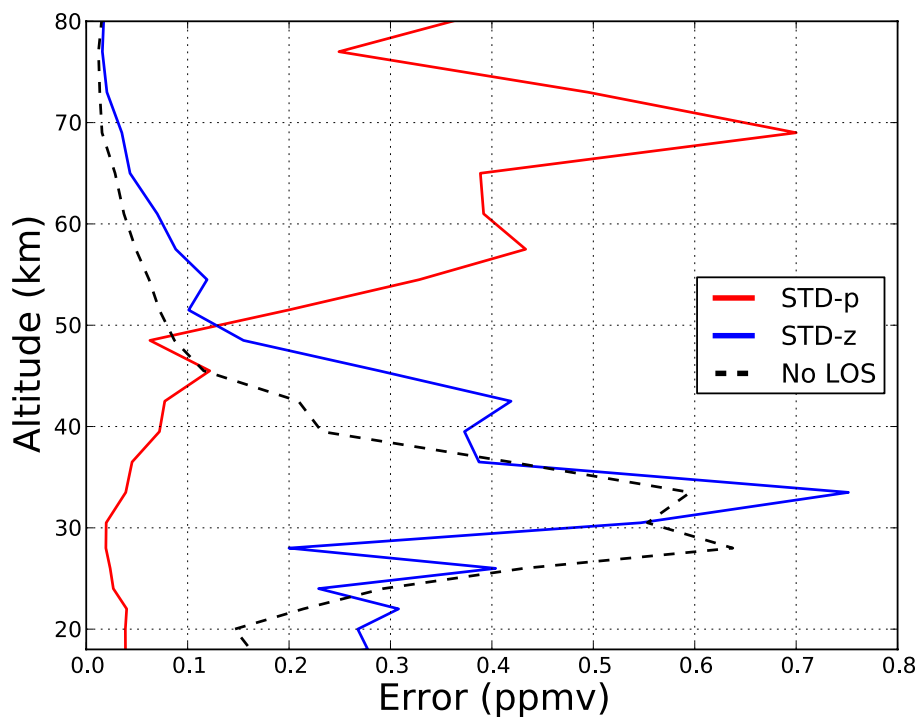


Fig. 13. Errors induced by the atmospheric pressure on a single O_3 profile retrieved from window A/B-w1. The blue line (STD-z) shows the error estimation when using altitude levels and the red line (STD-p) shows the error for an estimation on pressure levels. The dashed line is the pressure-induced error on the O_3 retrieved profile if the line-of-sight angles are not retrieved. The assumed uncertainty on the pressure profile is given in Table 4.

SMILES Level 2 research algorithms

P. Baron et al.

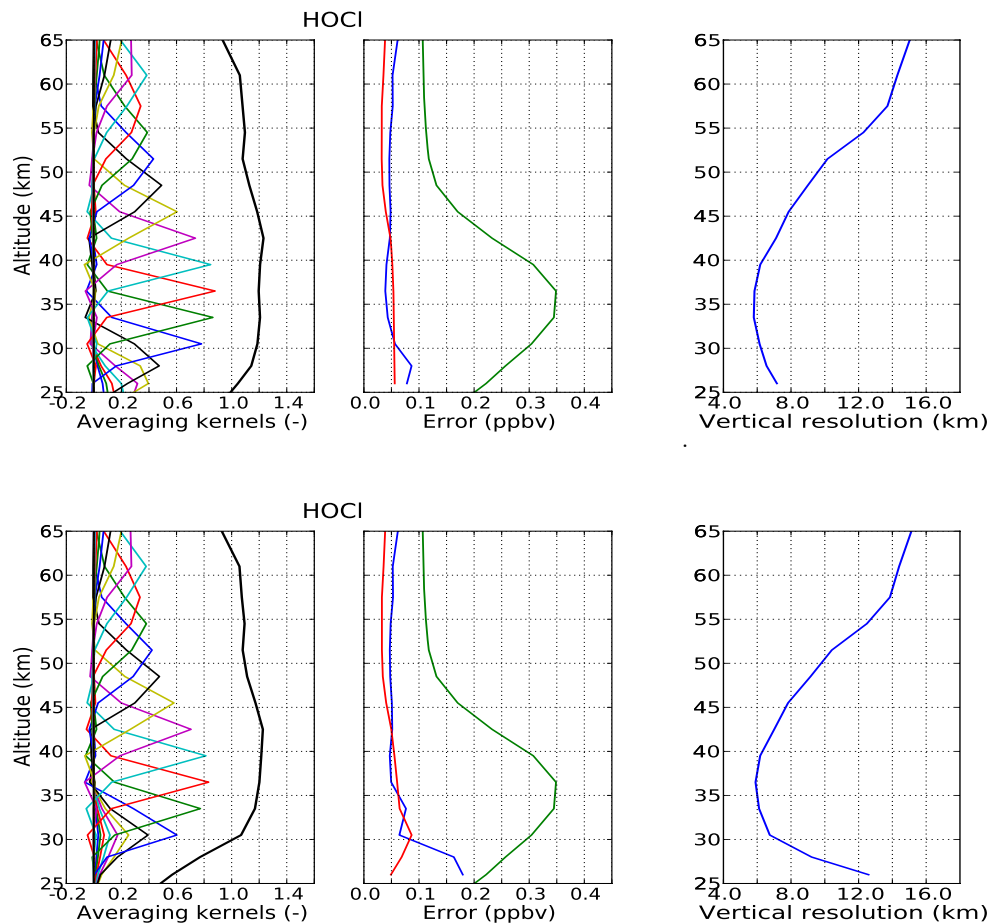


Fig. 14. Same as Fig. 8 but for the HOCI profile retrieved from windows A/B-w1 (upper row) and A-w3 or B-w4 (lower row).

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

I◀

▶I

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



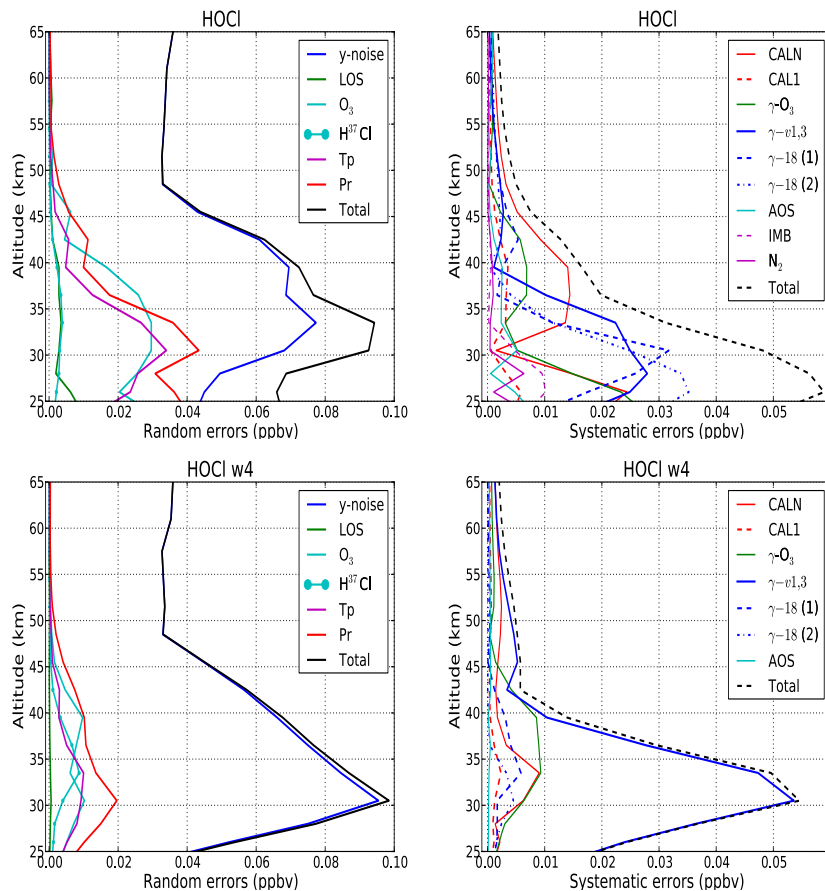


Fig. 15. Upper row: random (left panel) and systematic (right panel) errors on the HOCl profile retrieved from window A/B-w1. Lower row: Same for the HOCl profile retrieved from A-w3 or B-w4. The meaning of the labels on the systematic errors and the assumed errors on the parameters are given in Table 4.